



1 2 3 4 5 6 7 8 9 10

A

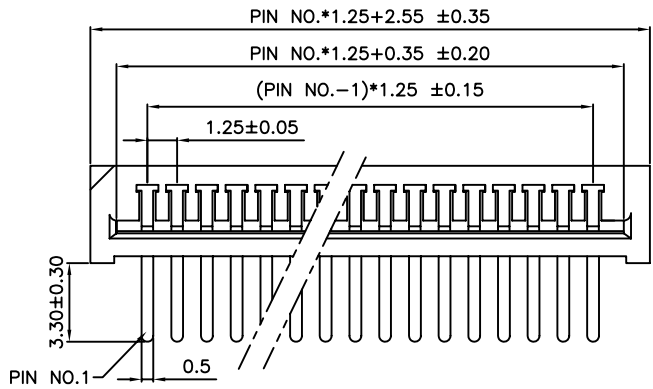

SPECIFICATIONS

Voltage Rating: 200V AC/DC  
 Current Rating: 1A AC/DC  
 Withstanding Voltage: 500V AC/minute  
 Insulation Resistance: 500MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 30mΩ max

WAFER

Part No: 125A-NPWS  
 Poles: 4-40  
 Material: Base: Nylon 46, UL94V-0  
 Contact: Phosphor Bronze  
 Finish: Ni 50u" Tin 120u" Plated

B




B

C

C

D

D

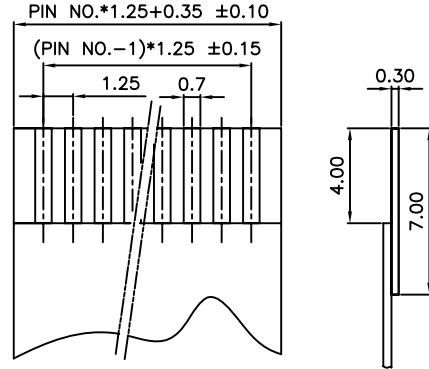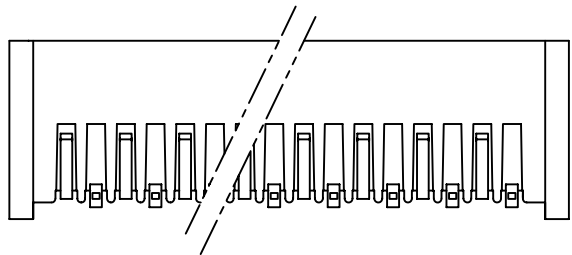


APPLICABLE FPC

F

F

G

G

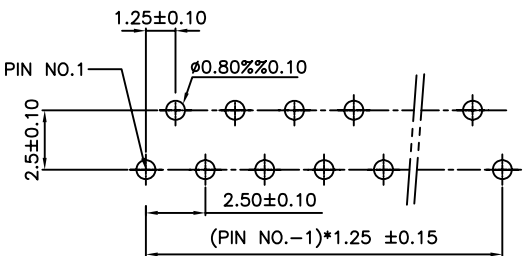

PCB LAYOUT

H

H

						OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	125A-NPWS
0	05/12/27		NEW			30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	1.25 Positive 90C FPC
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.	↙	DRAWING NO.	125A-NPWS

1 2 3 4 5 6 7 8 9 10