



1 2 3 4 5 6 7 8 9 10




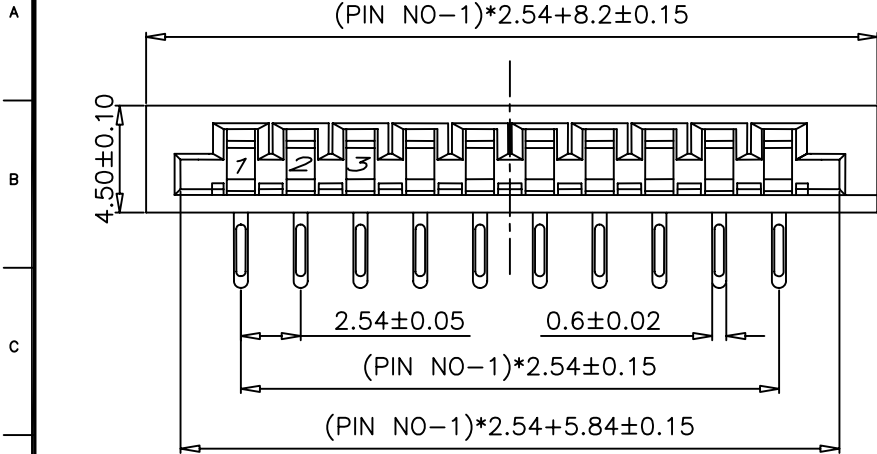


SPECIFICATIONS

Voltage Rating: 200V AC/DC
 Current Rating: 1.0A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 30mΩ max
 Poles: 3-27

MATERIAL

1. Housing: Nylon46 UL94V-0
2. Locker: PPS, UL94V-0
3. Contact: Phosphor bronze, Tin plated
4. Solder tab: Phosphor bronze, Tin plated

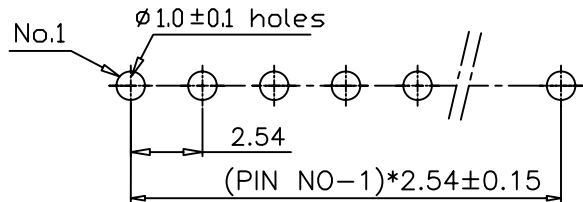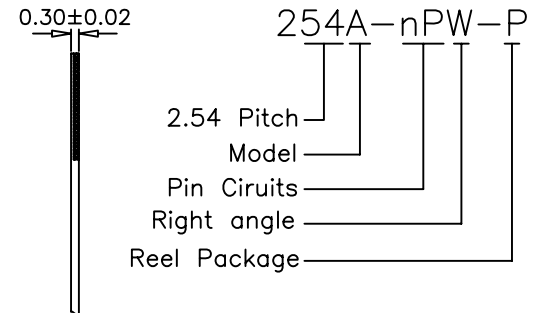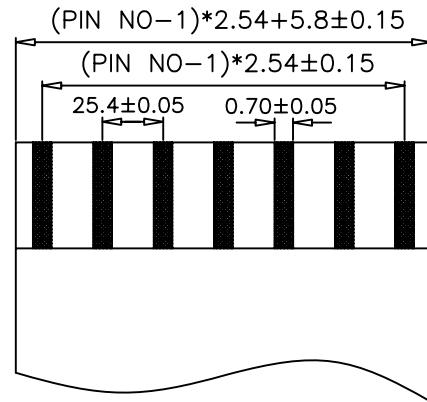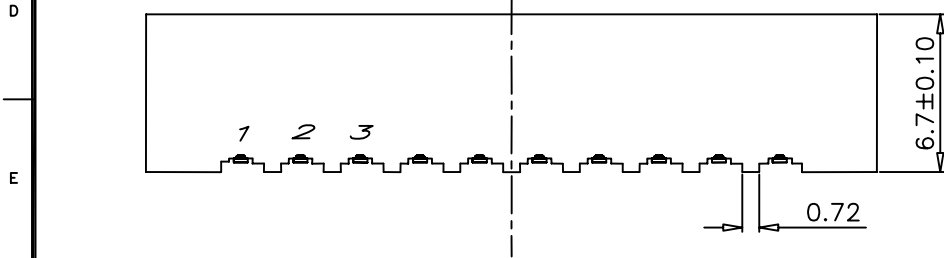

RECOMMENDED PCB LAYOUT

APPLICABLE FFC

						OPERATION	DRAW	CHENA	14/09/18	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky	14/09/18	SIZE	A4	PART NO.	254A-nPW
						30 ~ ±0.50	APPROVE	HELLEN	14/09/18	SHEET	1/1	TITLE:	2.54mm Pitch "A" Right angle FPC
0	05/12/27		NEW			Angle ± 2'				PROJ.	◆	DRAWING NO.	254A-nPW
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							

1 2 3 4 5 6 7 8 9 10