



1 2 3 4 5 6 7 8 9 10

A

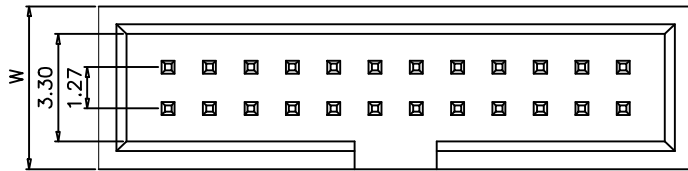


B

C

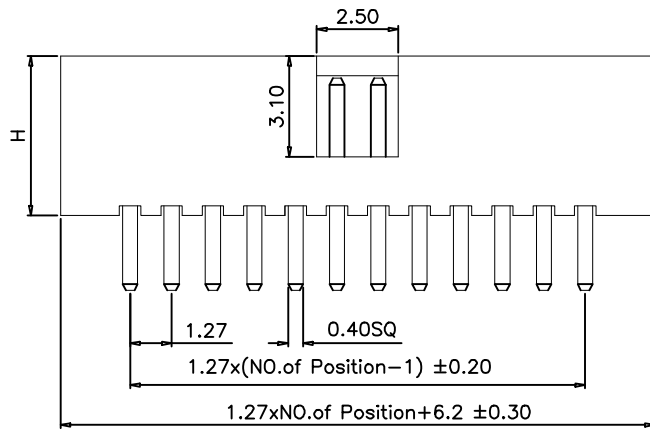


D

E



P.C.B LAYOUT



SPECIFICATIONS

Current Rating:1.0 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:300V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:Nylon6T,UL94V-0  
 Soldering Temperature:+220°C,10S max

Dimension						
H	W	PA	PB	PC	PD	PW
4.90	5.00	/	/	2.30	/	/
5.70	5.60	/	/	2.30	/	/

BH127Hxx-ST-XXXP

Insulator height  
 2.0mm: 200

ST: Straight 180°  
 RT: Right-angle 90°  
 SMT: Surface-Mount

No. of Circuits  
 1: Single row  
 2: Dual row

H

H

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		<b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30				SIZE	A4	PART NO.	BH127Hxx-ST-2xXXP
0	05/12/27		NEW		30 ~ ±0.50	CHECK	MICKY	2010.03.06	SHEET	1/1	TITLE	1.27mm Box Header Dual Row Straight Dip Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	HELLEN	2010.03.06	PROJ.	◆ ←		

1 2 3 4 5 6 7 8 9 10