
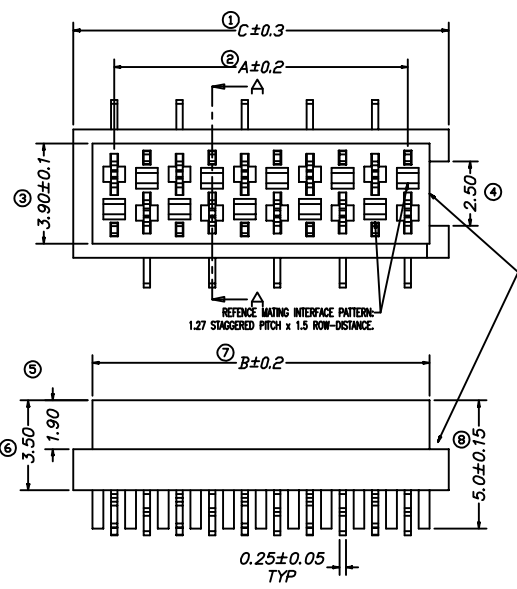


NOTES:


- Insulator: PA9T(UL94V-0)
- Contact: Bronze
- Contact: Tin Over Nickel
- Current Rating : 1A AC,DC
- Contact Resistance: 20mΩ Max.
- Dielectric Withstanding: AC 500V
- Insulator Resistance: 1000MΩ Min.
- Operating Temp.: -40°C~+105°C
- Voltage Rating: 500V AC,DC

RoHS



NUMBER OF POSITIONS	DIMENSION			Q'ty /Tube
	A	B	C	
04	3.81	5.50	6.99	82
06	6.35	8.04	9.53	60
08	8.89	10.58	12.07	48
10	11.43	13.12	14.61	39
12	13.97	15.66	17.15	33
14	16.51	18.20	19.69	29
16	19.05	20.74	22.23	26
18	21.59	23.28	24.77	23
20	24.13	25.82	27.31	21
22	26.67	28.36	29.85	19
24	29.21	30.90	32.39	17
26	31.75	33.44	34.93	16

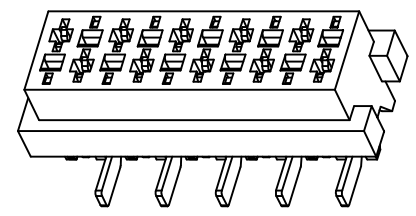

POLARISATION SLOT

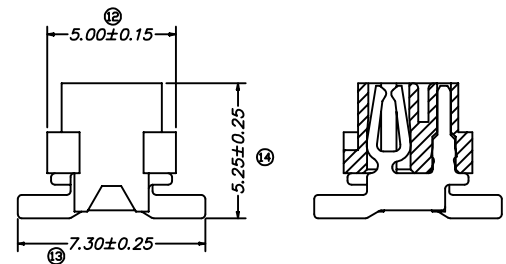

SECTION A-A

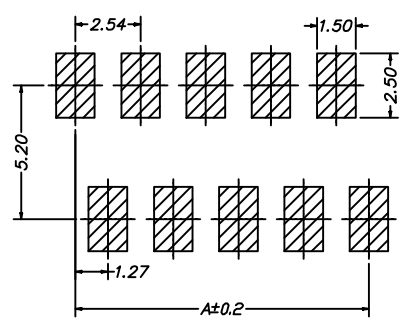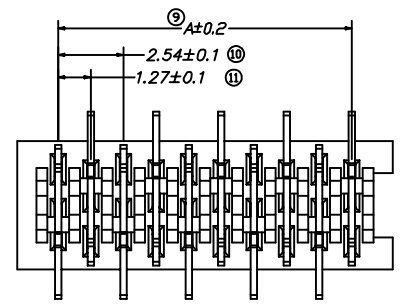

Recommended P.C. Board Layout

					OPERATION	DRAW	YANG	2016.09.07	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2016.09.07	SHEET	A4	PART NO.	IDC127-150-SMT-XXP-RD
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	ALLEN	2016.09.07	PROJ.	1/1	TITLE:	1.27*1.5 IDC SMT 无耳 有台 单缺
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM ± 2' TOI						DRAWING NO.	IDC127-150-SMT-XXP