

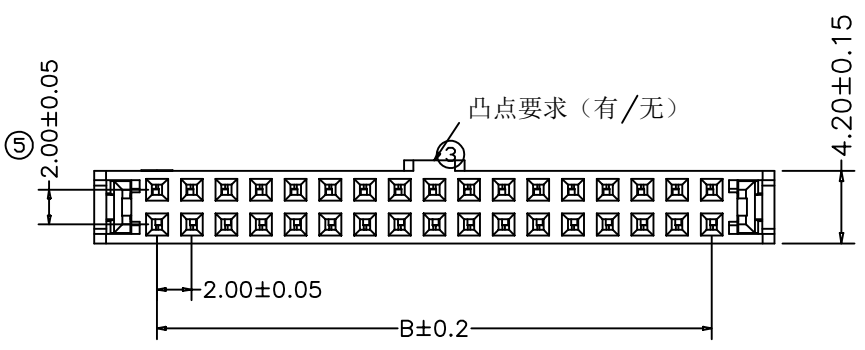

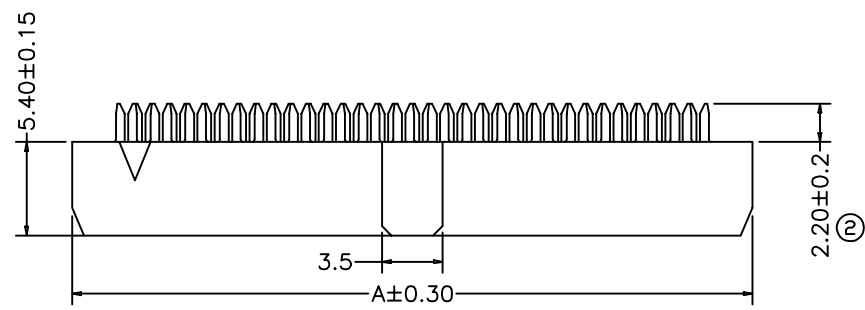



MATERIAL&FINISH
 Insulator: PBT Glass Fiber(UL94V-0)
 Contact : Brass OR Phosphor bronze/Phosphorus bronze
 Contact : Gold-Plated (1U'/3u'/5u'/15u'/30u')Over Nickel.

SPECIFICATIONS
 Current Rating :1A AC,DC
 Voltage Rating : 250V AC,DC
 Temperature Range:-40°C To+105°C
 Contact Resistance:20MΩ Max
 Ingulation Resistance:1000MΩ Min
 Withstanding Voltage:500V AC/Min

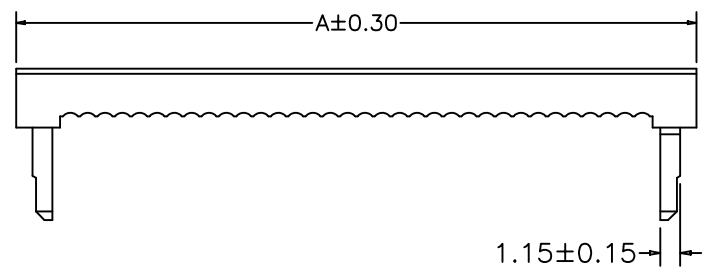

PART NO	Dim. A	Dim. B
IDC200NH86-2-6P	11.2	4.0
IDC200NH86-2-8P	13.2	6.0
IDC200NH86-2-10P	15.2	8.0
IDC200NH86-2-12P	17.2	10.0
IDC200NH86-2-14P	19.2	12.0
IDC200NH86-2-16P	21.2	14.0
IDC200NH86-2-18P	23.2	16.0
IDC200NH86-2-20P	25.2	18.0
IDC200NH86-2-22P	27.2	20.0
IDC200NH86-2-24P	29.2	22.0
IDC200NH86-2-26P	31.2	24.0
IDC200NH86-2-28P	33.2	26.0
IDC200NH86-2-30P	35.2	28.0
IDC200NH86-2-34P	39.2	32.0
IDC200NH86-2-36P	41.2	34.0
IDC200NH86-2-40P	45.2	38.0
IDC200NH86-2-44P	49.2	42.0
IDC200NH86-2-50P	55.2	48.0
IDC200NH86-2-60P	65.2	58.0

					OPERATION	DRAW	YANG	2015.08.11	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	TITLE: IDC2.0 两件式带凸点2xNP
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky	2015.08.11	SIZE	A4	SHEET 1/1	DRAWING NO. IDC200NH860-2-2xXXP
0		NEW			30 ~ ±0.50	APPROVE	Hellen	2015.08.11	PROJ.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'	DIM						