
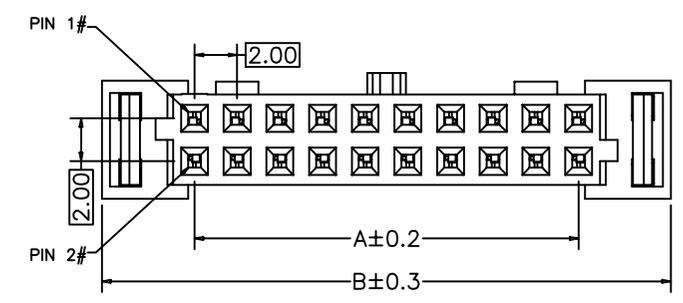




NOTES:
 Insulator Material: PBT, UL 94V-0
 Contact Plating: Gold flash over nickel
 Contact Material: Brass
 Current Rating : 1A AC,DC
 Contact Resistance: 20MΩ Max.
 Dielectric Withstanding: AC 500V
 Insulator Resistance: 1000MΩ Min.
 Operating Temp.: -40°C~+105°C

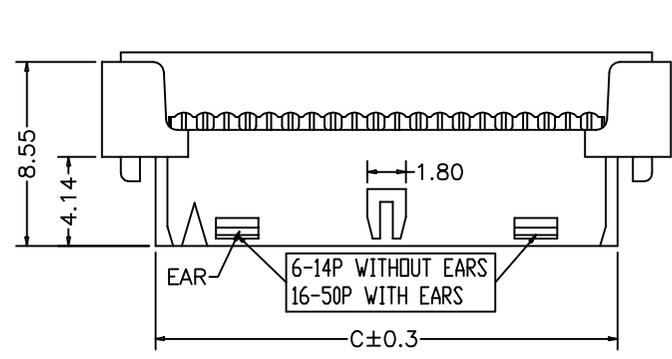

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
10	8.00	16.65	11.65
12	10.00	18.65	13.65
14	12.00	20.65	15.65
16	14.00	22.65	17.65
18	16.00	24.65	19.65
20	18.00	26.65	21.65
22	20.00	28.65	23.65
24	22.00	30.65	25.65
26	24.00	32.65	27.65
28	26.00	34.65	29.65
30	28.00	36.65	31.65
34	32.00	40.65	35.65
40	38.00	46.65	41.65
44	42.00	50.65	45.65
50	48.00	56.65	51.65

					OPERATION	DRAW	SIMON	2014.12.26	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2014.12.26	SIZE	A4	PART NO.	IDC200NH900-2-2xXXP
0	05/12/27				30 ~ ±0.50	APPROVE	HELLEN	2014.12.26	SHEET	1/1	TITLE:	2.00 IDC 二件套
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM ± 2' TO L				PROJ.	⊕	DRAWING NO.	IDC200NH900-2-2xXXP