



1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G




A
B
C
D
E
F
G

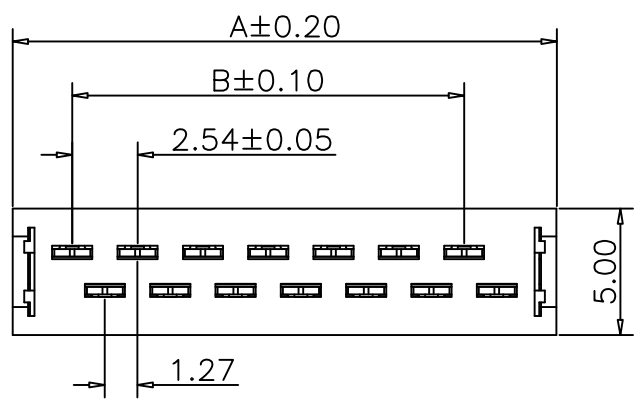


Circuits	Dimension	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.83	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

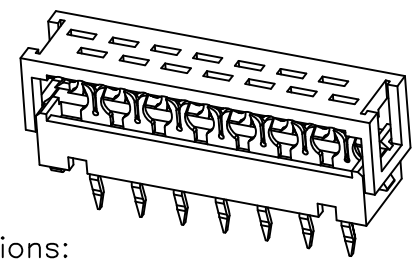

Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact tesistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C
 Materials:
 Insulator:High Temp Plastic UL94V-0
 Contact material:Phosphor Bronze
 Finish:Tin Plated
 How to Order

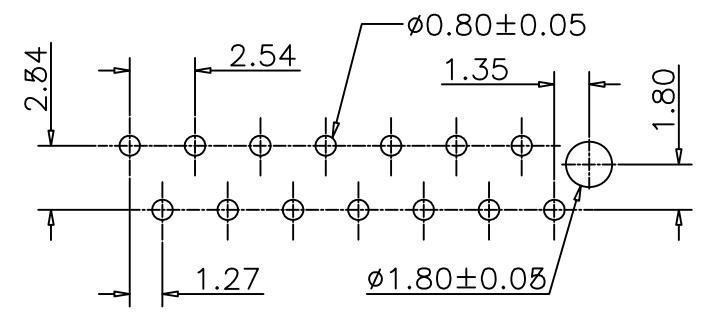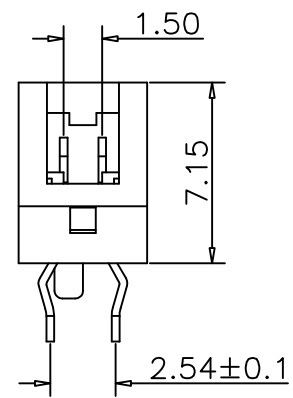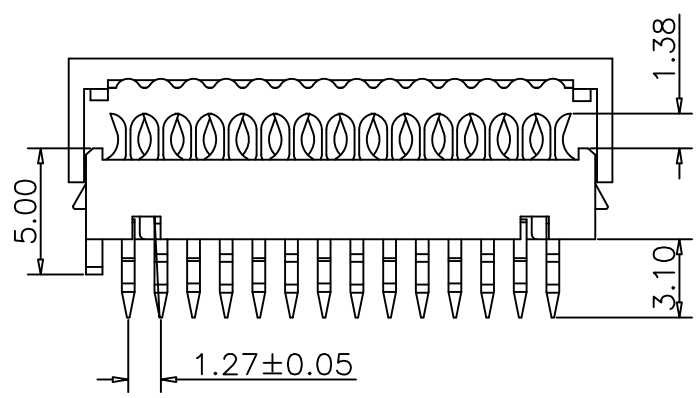

PCB Layout

					OPERATION	DRAW	Micky.Liu	2006/05/02	SCALE		 森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Judy.Huang	2006/05/02	SIZE	A4	PART NO.	IDC254V-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	2.54mm IDC 180C DIP Socket
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'	DIM TOL			PROJ.	◆		IDC254V-XXP

1 2 3 4 5 6 7 8 9 10