

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 0.5A AC/DC
- Voltage Rating: 30V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 200VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:







- Insulator (Housing): LCP (UL94V-0)
- Contacts: Phosphor Bronze/Gold Plated
- Color: Beige, Black


Ordering Information

SCT0800WVS - ** F 1 ** 501

No. of Pins See Table
Insulation F=LCP
Package 1=Tape&Reel
Color BE=Beige BK=Black

11	8.00	11.00	9.10				
10	7.20	10.20	8.30	20	15.20	18.20	16.30
9	6.40	9.40	7.50	19	14.40	17.40	15.50
8	5.60	8.60	6.70	18	13.60	16.60	14.70
7	4.80	7.80	5.90	17	12.80	15.80	13.90
6	4.00	7.00	5.10	16	12.00	15.00	13.10
5	3.20	6.20	4.30	15	11.20	14.20	12.30
4	2.40	5.40	3.50	14	10.40	13.40	11.50
3	1.60	4.60	2.70	13	9.60	12.60	10.70
2	0.80	3.80	1.90	12	8.80	11.8	9.90
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

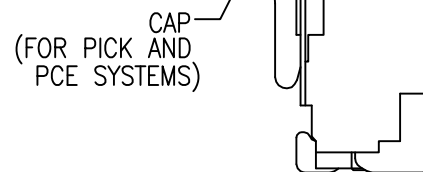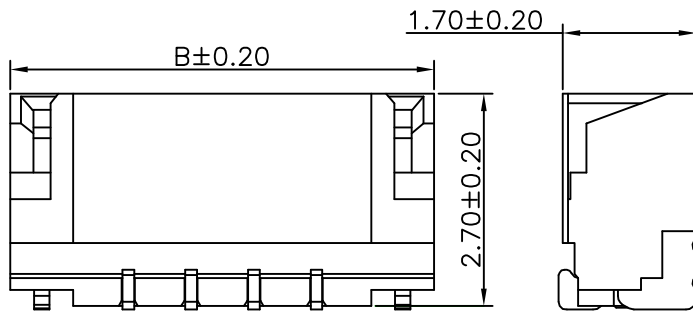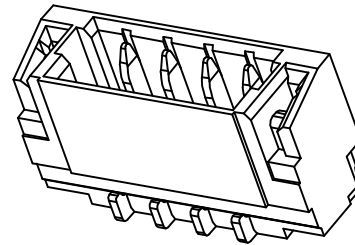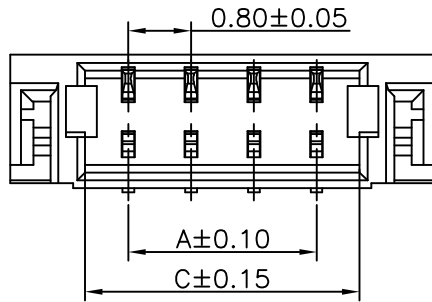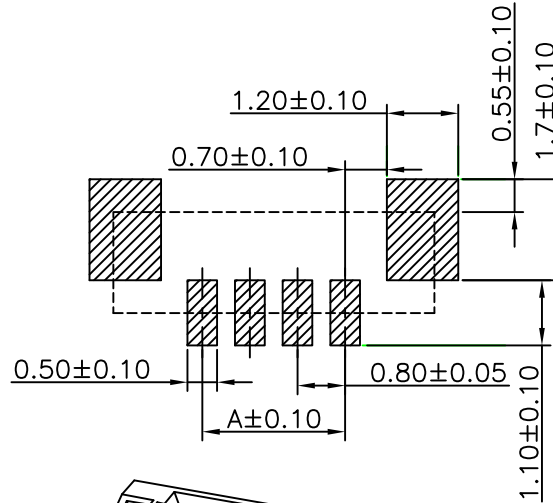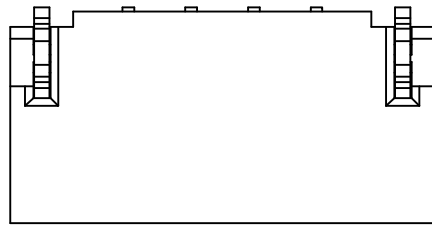

					OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
	A1	2021.07.05	Changed from SCT0800WV-S-xxP to SCT0800WVS-xxF1xx501		X.XX ±0.25		CHECK	Lisa	2021.07.05	SIZE		A4
	AO	2006.05.02	NEW		X.XXX ±0.15	APPROVE	Allen	2021.07.05	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				PROJ.	⊕	PART NO.	SCT0800WVS-xxF1xx501
					DIM	TOL			TITLE:			0.80mm Pitch 180° Wafer Connector