
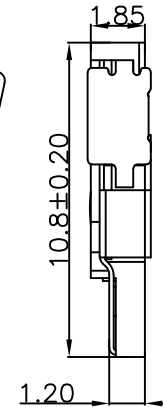
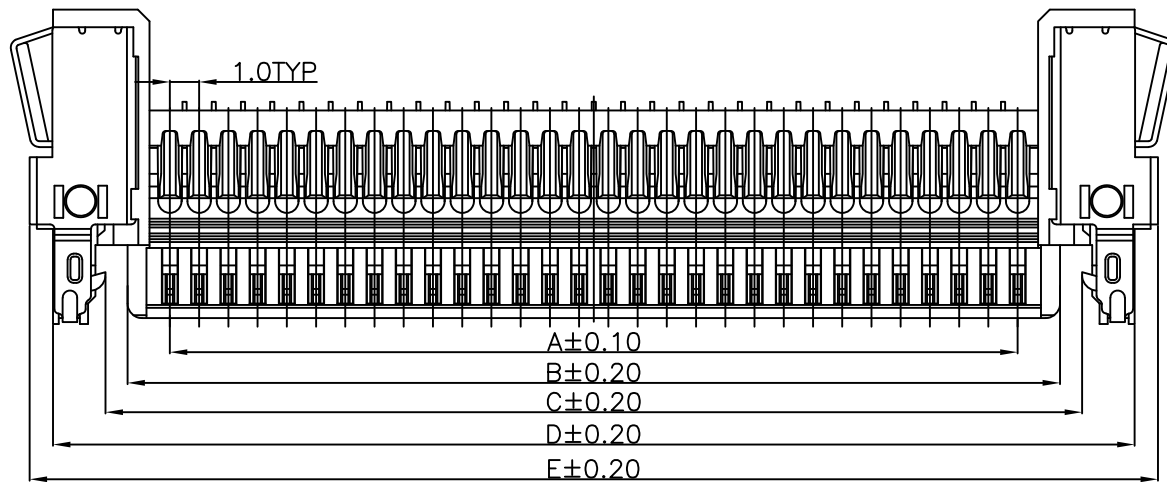



RoHS

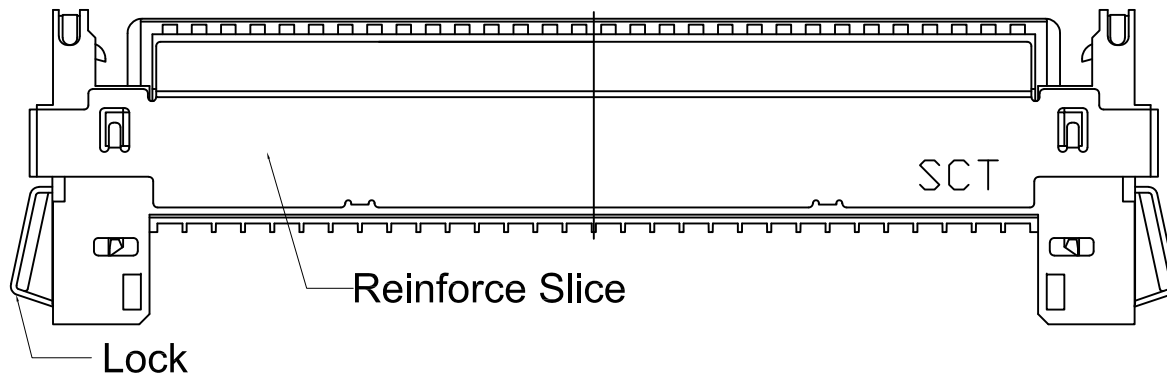

Specification:

- Current Rating: 0.5A AC/DC
- Voltage Rating: 200V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +80°C

Material:

- Insulator (Housing): Nylon 46 (UL94V-0)
- Shell:Stainless Steel
- LOCK:Stainless Steel
- Color: Beige

Ordering Information

SCT1005H - xx G BE 104

Insulation G=PA46 Color BE=Beige

30	29.00	31.90	33.30	37.00	38.60
20	19.00	21.90	23.30	27.00	28.60
Poles	A	B	C	D	E
	Dimensions				

						OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.10	Changed from SCT1005H-xxP to SCT1005H-xxGBE104				X.XX ±0.25		CHECK	Lisa	2021.07.10	SIZE		A4
AO	2006.05.02	NEW				X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle ± 3'	DIM	TOL		PROJ.	⌀	TITLE:	FI-x 1.00mm Pitch Housing Connector