
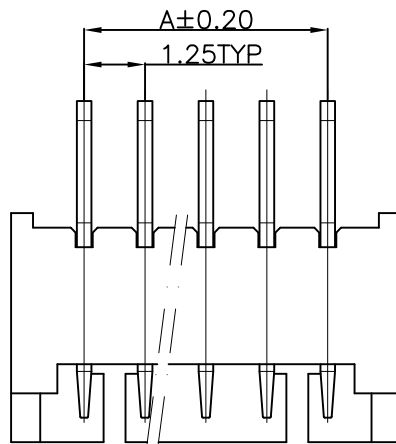
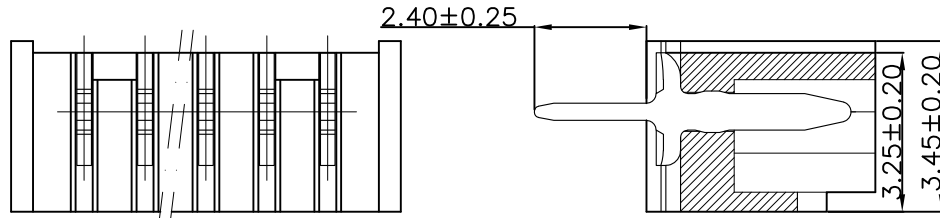
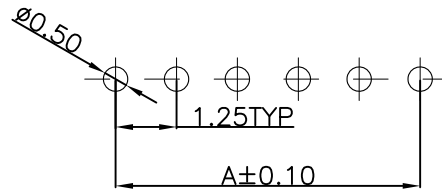


RoHS

Recommended P.C.B Layout
General Tolerance±0.05

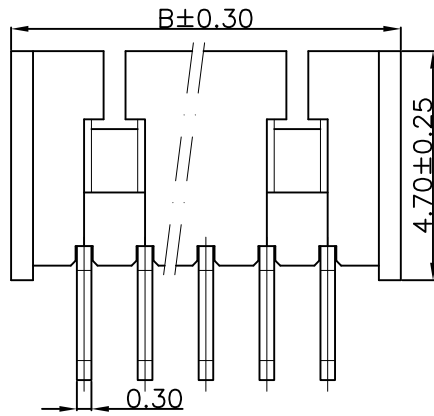

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

Material:



- Insulator (Housing): Nylon 46 (UL94V-0)
- Contacts:Brass,Tin Plated
- Color: Beige
- Q'TY: 1000PCS/Bag

Ordering Information

SCT1251WV - ** G 0 BE 102

No.of Pins See Table Insulation G=PA46 Package 0=PE Bag Color BE=Beige

11	12.50	15.50			
10	11.25	14.25			
9	10.00	13.00			
8	8.75	11.75			
7	7.50	10.50			
6	6.25	9.25	16	18.75	21.75
5	5.00	8.00	15	17.50	20.50
4	3.75	6.75	14	16.25	19.25
3	2.50	5.50	13	15.00	18.00
2	1.25	4.25	12	13.75	16.75
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE		 SCONDAR ELECTRONIC LIMITED
A1	2021.07.05	Changed from SCT1251WV-xxP to SCT1251WV-xxGOBE102			X.X	±0.35			UNIT	mm	
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2021.07.05	SHEET	1/1	
					Angle	± 3'			PROJ.		TITLE: MX 1.25mm 180° Wafer