

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

- Specification:
- Current Rating: 1A AC/DC
 - Voltage Rating: 125V AC/DC
 - Insulation Resistance: 100MΩ Min
 - Withstanding Voltage: 500VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -40°C to +85°C






- Material:
- Insulator (Housing): Nylon 9T (UL94V-0)
 - Contacts:Brass,Tin Plated
 - Color: Beige

Ordering Information

SCT1251WVS - ** E * BE 102

No.of Pins See Table Insulation E=PA9T Package 1=Tape&Reel 2=Tube Color BE=Beige

10	11.25	14.25	17.35				
9	10.00	13.00	16.10				
8	8.75	11.75	14.85				
7	7.50	10.50	13.60	16	18.75	21.75	24.85
6	6.25	9.25	12.35	15	17.50	20.50	23.60
5	5.00	8.00	11.10	14	16.25	19.25	22.35
4	3.75	6.75	9.85	13	15.00	18.00	21.10
3	2.50	5.50	8.60	12	13.75	16.75	19.85
2	1.25	4.25	7.35	11	12.50	15.50	18.60
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

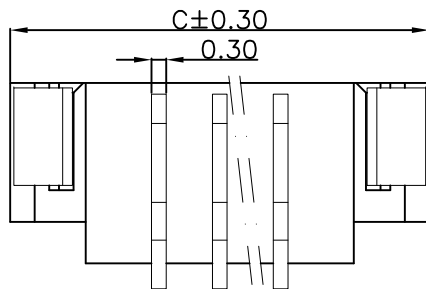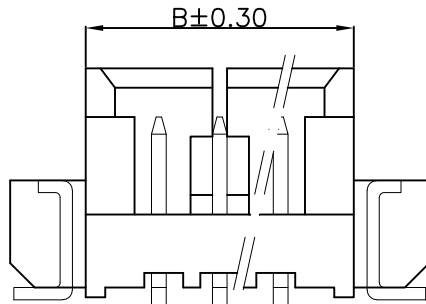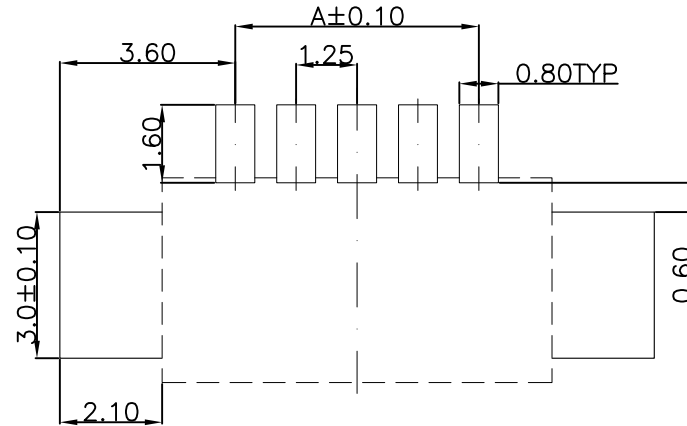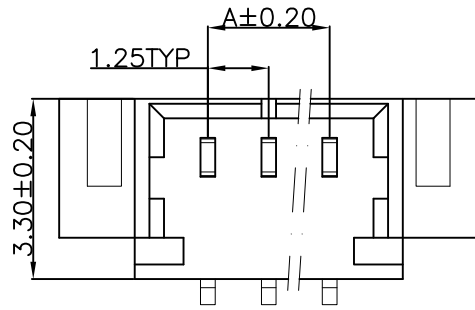

					OPERATION	DRAW	Peng	2021.07.05	SCALE		 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.05	Changed from SCT1251WV-S-xxP to SCT1251WVS-xxExBE102			X.XX ±0.25		CHECK	Lisa	2021.07.05	SIZE		A4
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.05	SHEET	1/1	PART NO.	SCT1251WVS-xxExBE102
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'		DIM	TOL	PROJ.		TITLE:	MX 1.25mm 180° SMT Wafer