

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 100V AC/DC
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 30mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Brown

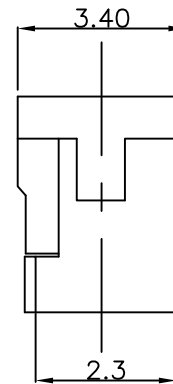
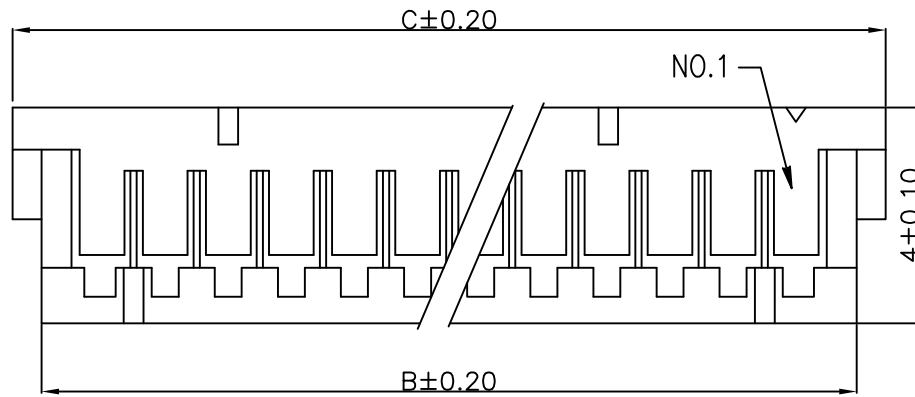
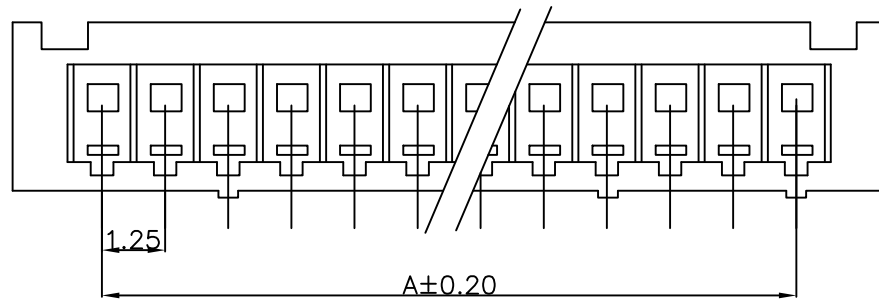
Ordering Information

SCT1252H - xx B BN 104



No.of Pins  
See Table

Insulation  
B=PA66

Color  
BN=Brown



11	12.50	14.30	15.40				
10	11.25	13.05	14.15				
9	10.00	11.80	12.90				
8	8.75	10.55	11.65				
7	7.50	9.30	10.40				
6	6.25	8.05	9.15				
5	5.00	6.80	7.90	15	17.50	19.30	20.40
4	3.75	5.55	6.65	14	16.25	18.05	19.15
3	2.50	4.30	5.40	13	15.00	16.80	17.90
2	1.25	3.05	4.15	12	13.75	15.55	16.65
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.02	Changed from SCT1252H-xxP to SCT1252H-xxBBN104			X.X	DESIGN			UNIT	mm	
AO	2006.05.02	NEW			X.XX	CHECK	Lisa	2021.07.02	SIZE	A4	
					X.XXX	APPROVE	Allen	2021.07.02	SHEET	1/1	
					Angle				PART NO.	SCT1252H-xxBBN104	
					DIM				PROJECT	DF13 1.25mm Pitch Housing Connector	