

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 200V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 40mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Black










Ordering Information

SCT1255H - xx B BK 134

No.of Pins  
See Table

Insulation  
B=PA66

Color  
BK=Black

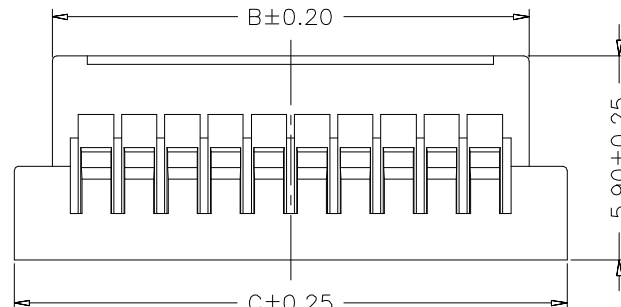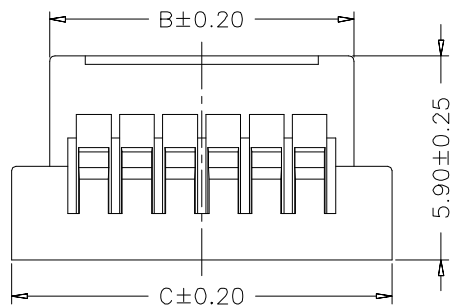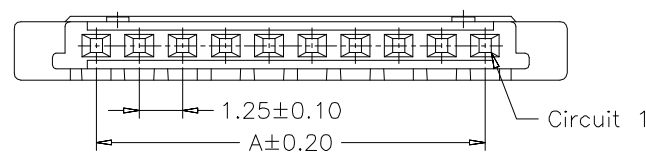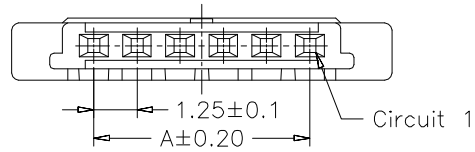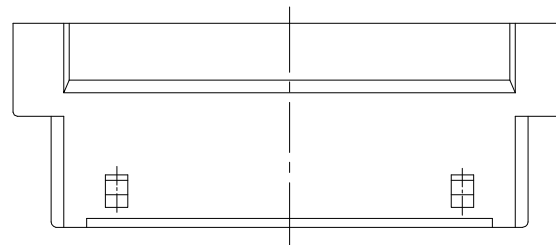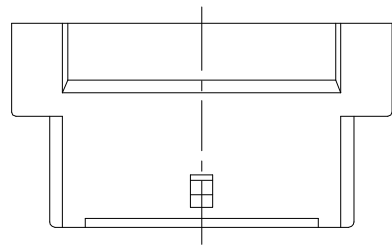

2P~6P

8P~30P

10	11.25	13.80	16.00				
9	10.00	12.55	14.75				
8	8.75	11.30	13.50				
7	7.50	10.05	12.25				
6	6.25	8.80	11.00				
5	5.00	7.55	9.75	30	36.25	38.80	41.00
4	3.75	6.30	8.50	25	30.00	32.55	34.75
3	2.50	5.05	7.25	20	23.75	26.30	28.50
2	1.25	3.80	6.00	15	17.50	20.05	22.25
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.05	Changed from SCT1255H-xxP to SCT1255H-xxBBK134			X.X	±0.35			UNIT	mm		
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PART NO.	SCT1255H-xxBBK134		
					DIM	TOL			PROJ.		TITLE:	JAE 1.25mm Pitch Housing Connector