







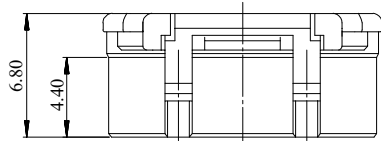
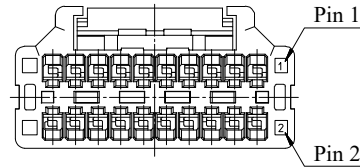



RoHS

Contact resistance(接触电阻): $\leq 30m\Omega$
 After environmental testing(环境测试后): $\leq 40m\Omega$
 The material :PT-PBT UL94V-0
 color:white

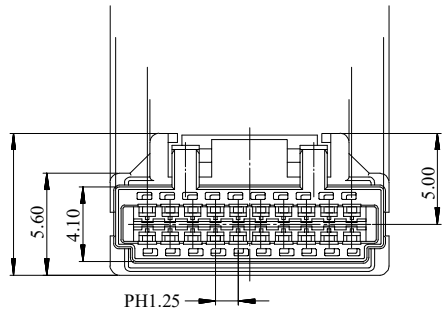

20Pin

30Pin

40Pin

| | | | | |
|---------------|-----------------------------|------------------------|-----------------------|-----------|
| 1220H-2*XX-PT | PBT UL94V-0 Halogen-Free | 1220T | 1220W | 1,000Pcs |
| 1220H-2*XX-PT | PBT UL 94V-0 | | | |
| PART NO | Material | Suitable YZDZ Terminal | Mates With YZDZ Wafer | Q' ty/Bag |

| Poles | Dimensions (mm) | | | |
|-------|-----------------|-------|-------|-------|
| | A | B | C | D |
| 20 | 15.35 | 14.75 | 11.25 | 10.95 |
| 30 | 21.60 | 21.00 | 17.50 | 17.20 |
| 40 | 27.85 | 27.25 | 23.75 | 23.45 |

东莞市晟凯达电子科技有限公司
 工程专用章

受控

| | | | | | | | | | | | |
|-----|------------|--|--------------------------|--------|-----------|------------|------|------------|----------|---------------------|-----------------------------------|
| | | | | | OPERATION | DRAW | Yang | 2022.06.22 | SCALE | - | SCONDAR ELECTRONIC LIMITED |
| | | | | | X.X | ± 0.35 | | | UNIT | mm | |
| | | | | | X.XX | ± 0.25 | | | SIZE | A4 | |
| | | | | | X.XXX | ± 0.15 | | | SHEET | 1/1 | |
| A0 | 2006.05.02 | | NEW | | Angle | $\pm 3'$ | | | PART NO. | SCT12510H-2XXDWT142 | |
| REV | DATE | | MODIFICATION DESCRIPTION | CHANGE | APPROVE | DIM | TOL | APPROVE | PROJ. | TITLE: | MX 1.20mm Pitch Housing Connector |