





RoHS

RoHS 
Lead-free

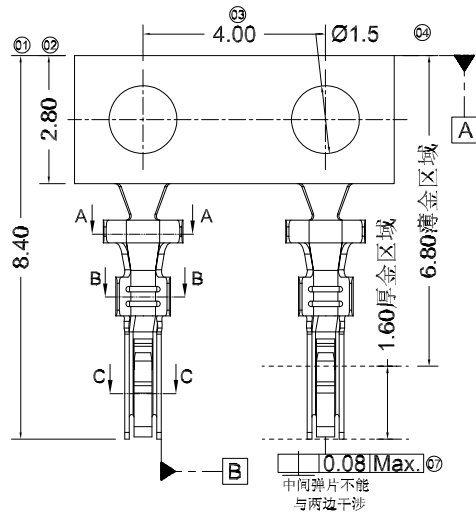

剖视图 A-A
比例 1:1


剖视图 B-B
比例 1:1

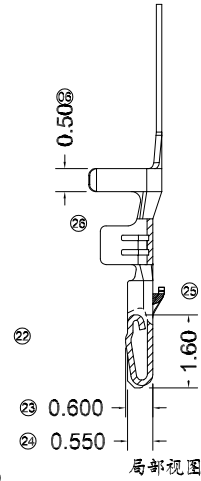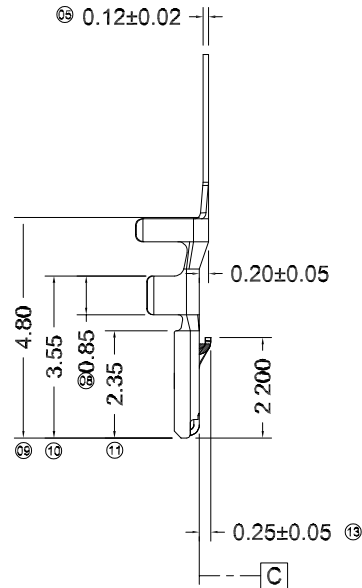

规格:

1. 额定电压: 50V AC / DC
2. 额定电流: 1A AC / DC
3. 接触电阻: $\leq 30\text{m}\Omega$
4. 环境测试后 (接触电阻): $\leq 50\text{m}\Omega$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. 耐压值: 500V AC/minute
7. 工作温度: -25°C~+85°C

端子适用线径: 28~30 AWG(0.13~0.05mm²),
绝缘O.D: 1.0mm最大




Ordering Information

SCT1256FT P BS 107

Material:
P=Phosphor Bronze

Contact Plated
S=BRIGHT TIN PLATED
100U"-180U"

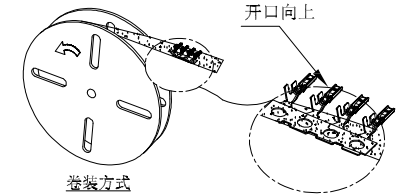

						OPERATION	DRAW	Yang	2021.03.03	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
						X.X	± 0.35			UNIT	mm		
						X.XX	± 0.25			SIZE	A4		
						X.XXX	± 0.15			SHEET	1/1		
AO	2015.03.03	NEW				Angle	$\pm 3'$	Lisa	2021.03.03	PART NO.	SCT1256FTPBS107		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE			TITLE:	MX 1.25mm Terminal		