



RoHS

东莞市晟凯达电子科技有限公司
工程专用章

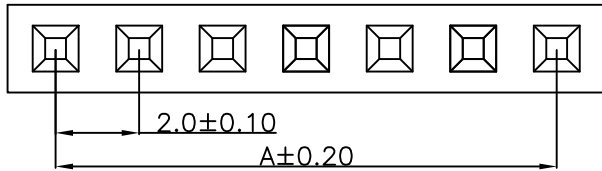

受控

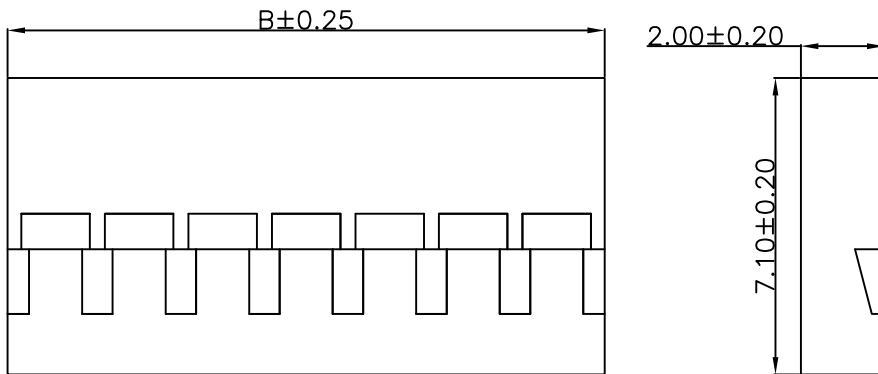

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PBT (UL94V-0)
- Color: Black

Ordering Information

SCT2015H - xx D BK 116

No.of Pins
See Table

Insulation
D=PBT

Color
BK=Black

| | | | | | | | | |
|-------|------------|-------|-------|------------|-------|-------|------------|-------|
| 9 | 16.00 | 18.30 | 18 | 34.00 | 36.30 | | | |
| 8 | 14.00 | 16.30 | 17 | 32.00 | 34.30 | | | |
| 7 | 12.00 | 14.30 | 16 | 30.00 | 32.30 | 25 | 48.00 | 50.30 |
| 6 | 10.00 | 12.30 | 15 | 28.00 | 30.30 | 24 | 46.00 | 48.30 |
| 5 | 8.00 | 10.30 | 14 | 26.00 | 28.30 | 23 | 44.00 | 46.30 |
| 4 | 6.00 | 8.30 | 13 | 24.00 | 26.30 | 22 | 42.00 | 44.30 |
| 3 | 4.00 | 6.30 | 12 | 22.00 | 24.30 | 21 | 40.00 | 42.30 |
| 2 | 2.00 | 4.30 | 11 | 20.00 | 22.30 | 20 | 38.00 | 40.30 |
| 1 | | 2.30 | 10 | 18.00 | 20.30 | 19 | 36.00 | 38.30 |
| Poles | A | B | Poles | A | B | Poles | A | B |
| | Dimensions | | | Dimensions | | | Dimensions | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | Peng | 2021.07.15 | SCALE | - | SCONDAR | SCONDAR ELECTRONIC LIMITED |
|-----|------------|--|--------|---------|-----------|-------|---------|------------|-------|-----|----------|---------------------------------------|
| A1 | 2021.07.15 | Changed from SCT2015H-xxP to SCT2015H-xxDBK116 | | | X.X | ±0.35 | DESIGN | | UNIT | mm | | |
| AO | 2009.10.15 | NEW | | | X.XX | ±0.25 | CHECK | Lisa | SIZE | A4 | | |
| | | | | | X.XXX | ±0.15 | APPROVE | Allen | SHEET | 1/1 | PART NO. | SCT2015H-xxDBK116 |
| | | | | | Angle | ± 3' | | | PROJ. | ☉ | TITLE: | Dupont 2.00mm Pitch Housing Connector |
| | | | | | DIM | TOL | | | | | | |