

RoHS

东莞市赛凯达电子科技有限公司  
工程专用章

受控

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PBT (UL94V-0)
- Color: Black




Ordering Information

SCT2015HN - 2xx D BK 116

No.of Pins  
See Table



Insulation  
D=PBT

Color  
BK=Black

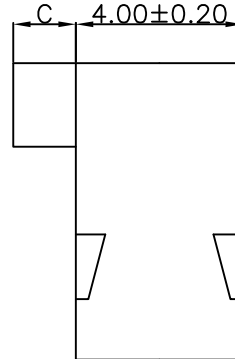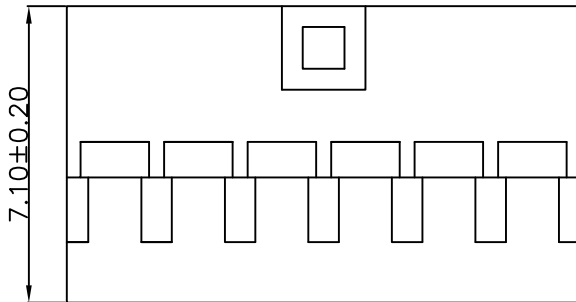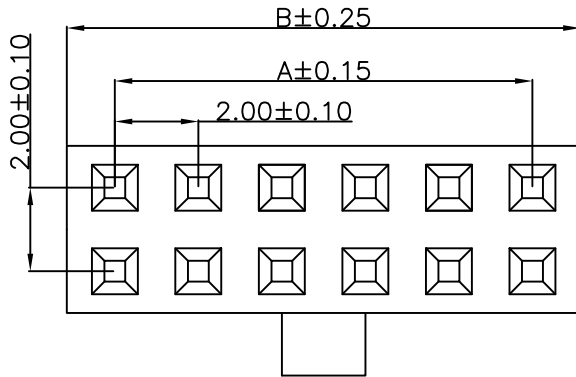

TYPE	HiPE	Low
C	2.00	1.00

2*10	18.00	20.30	2*19	36.00	38.30			
2*9	16.00	18.30	2*18	34.00	36.30			
2*8	14.00	16.30	2*17	32.00	34.30			
2*7	12.00	14.30	2*16	30.00	32.30	2*25	48.00	50.30
2*6	10.00	12.30	2*15	28.00	30.30	2*24	46.00	48.30
2*5	8.00	10.30	2*14	26.00	28.30	2*23	44.00	46.30
2*4	6.00	8.30	2*13	24.00	26.30	2*22	42.00	44.30
2*3	4.00	6.30	2*12	22.00	24.30	2*21	40.00	42.30
2*2	2.00	4.30	2*11	20.00	22.30	2*20	38.00	40.30
Poles	A	B	Poles	A	B	Poles	A	B
	Dimensions			Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.15	Changed from SCT2015HN-2xxP to SCT2015HN-2xxDBK116			X.X	±0.35			UNIT	mm	
AO	2009.10.15	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2021.07.15	SHEET	1/1	
					Angle	± 3'			PART NO.	SCT2015HN-2xxDBK116	
					DIM	TOL	APPROVE	Allen	2021.07.15	PROJ.	 TITLE: Dupont 2.00mm Pitch Housing Connector