


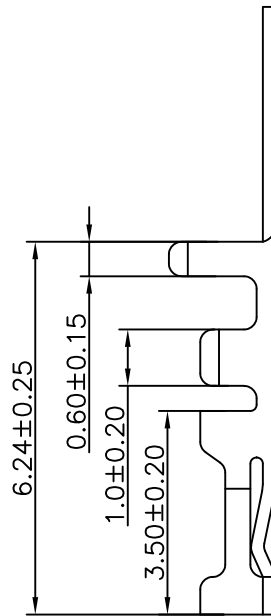



RoHS

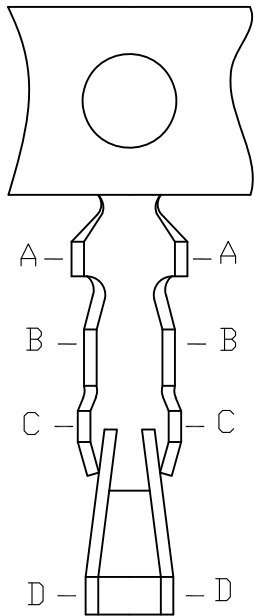


SECTION:A-A



SECTION:B-B



SECTION:C-C



SECTION:D-D

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1000VAC(Min)
- Operation Temperature: -25°C to +85°C


Material:

- Wire Range:24AWG~28AWG
- Insulation O.D: 1.5mm Max
- Material: Phosphor Bronze,T=0.20mm
- Finish: Half Gold Plated
- Q'TY: 10,000Pcs/Reel

Ordering Information

SCT2015T P F 112

Material:
P=Phosphor Bronze F=Half Gold Plated

					OPERATION	DRAW	Peng	2021.07.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2021.07.15	SIZE		A4
A1	2021.07.15	Changed from SCT2015-TPHG to SCT2015TPF112			X.XXX ±0.15	APPROVE	Allen	2021.07.15	SHEET	1/1		PART NO.
AO	2019.10.15	NEW			Angle ± 3'				PROJ.	⌀	TITLE:	Dupont 2.0mm Terminal
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							