
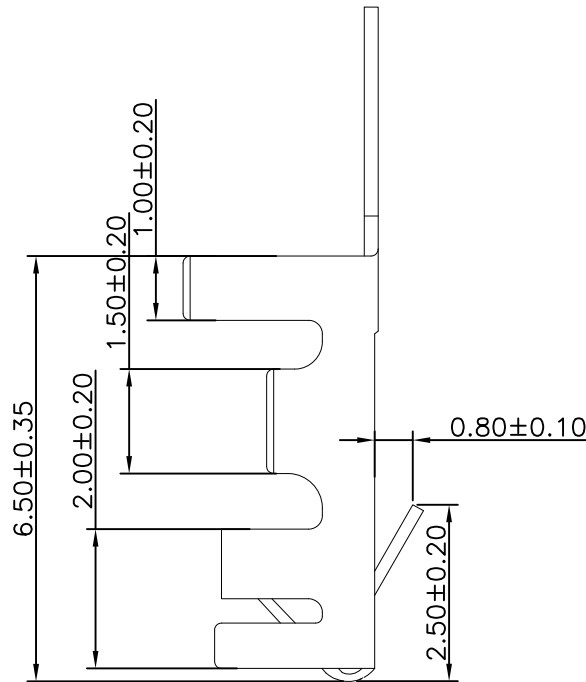


RoHS

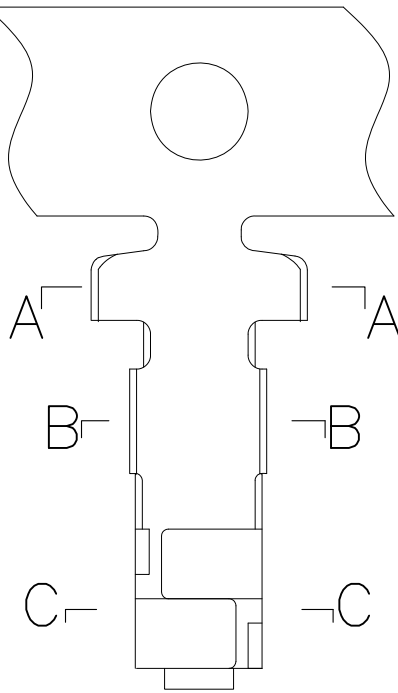


Specification:


- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1000VAC(Min)
- Operation Temperature: -25℃ to +85℃

Material:


- Wire Range: 22AWG~28AWG(OD:1.9mm)
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 8500Pcs/Reel



SECTION: A-A



SECTION: B-B

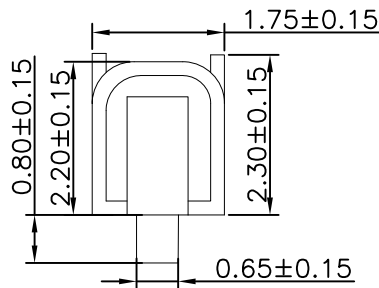

SECTION: C-C

Ordering Information

SCT2502T P S 102

Material:
P=Phosphor Bronze

Contact Plated
S=Tin Plated

东莞市诚凯达电子科技有限公司
工程专用章

受控

					OPERATION	DRAW	Peng	2021.07.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
					X.XXX ±0.15	CHECK	Lisa	2021.07.06	SHEET	1/1	PART NO.	SCT2502TPS102
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM TOL	Allen	2021.07.06	PROJ.	⌀	TITLE:	XHA 2.50mm Terminal