

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC Min
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Insulator (Housing): PA66 (UL94V-2)
- Contacts: Brass
- Solder: Tin Plated
- Color: White

Ordering Information

SCT2502WR - ** C 0 WT 102

No. of Pins
See Table

Insulation
C=PA66 V2




Package
0=PE Bag

Color
WT=White

东莞市诚凯达电子科技有限公司
工程专用章

受控

10	22.50	27.50			
9	20.00	25.00			
8	17.50	22.50			
7	15.00	20.00	16	37.50	42.50
6	12.50	17.50	15	35.00	40.00
5	10.00	15.00	14	32.50	37.50
4	7.50	12.50	13	30.00	35.00
3	5.00	10.00	12	27.50	32.50
2	2.50	7.50	11	25.00	30.00
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

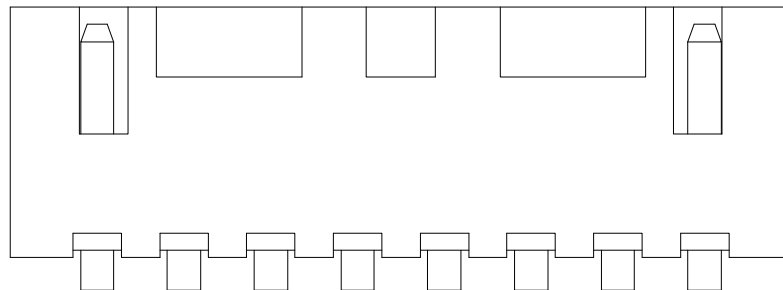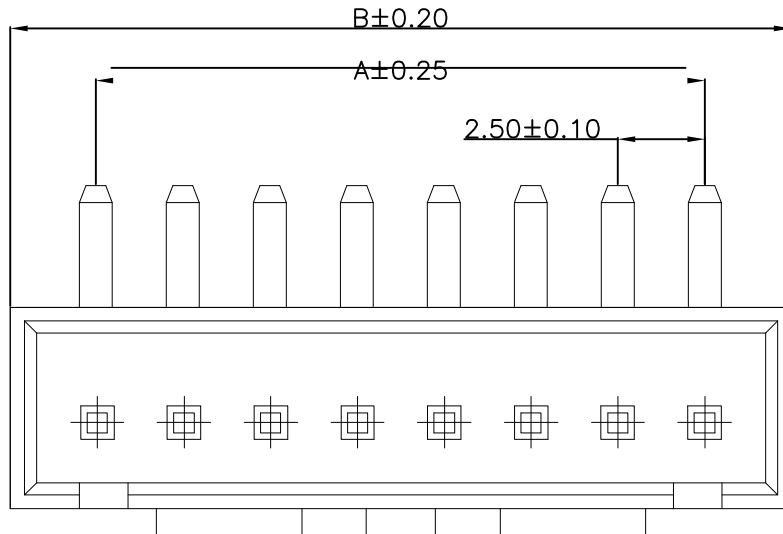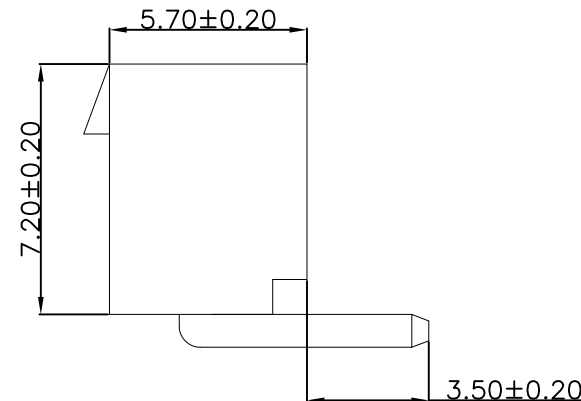

					OPERATION		DRAW	Peng	2021.07.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35	DESIGN			UNIT	mm			
A1	2021.07.06	Changed from SCT2502WR—xxP to SCT2502WR—xxCOWT102		_____	X.XX	±0.25				SIZE	A4			
A0	2006.05.02	NEW		_____	X.XXX	±0.15	CHECK	Lisa	2021.07.06	SHEET	1/1			PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM	± 3' TOL	APPROVE	Allen	2021.07.06	PROJ.		TITLE:	XHA 2.50mm Pitch 90° Wafer Connector