


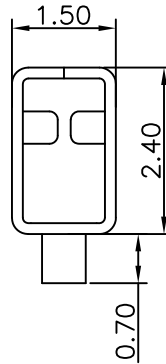


RoHS

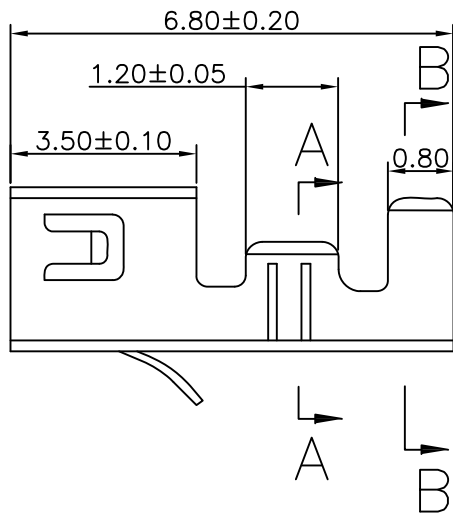

SECTION:A-A



SECTION:B-B

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 800MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1000VAC(Min)
- Operation Temperature: -25°C to +85°C




Material:

- Wire Range:22AWG~28AWG(OD:1.9mm)
- Material: Phosphor Bronze,T=0.20mm
- Finish: Tin Plated
- Q'TY: 8000Pcs/Reel

Ordering Information

SCT2503T P S 102

Material:
P=Phosphor Bronze S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25		CHECK	Lisa	2021.07.06	SIZE		A4	
A1	2021.07.06	Changed from SCT2503TP to SCT2503TPS102			X.XXX ±0.15	APPROVE	Allen	2021.07.06	SHEET	1/1	PART NO.	SCT2503TPS102	
AO	2015.03.03	NEW			Angle ± 3'				PROJ.		TITLE:	Dupont 2.5mm Terminal	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL								