




RoHS



2.54 ± 0.10
 $A \pm 0.20$

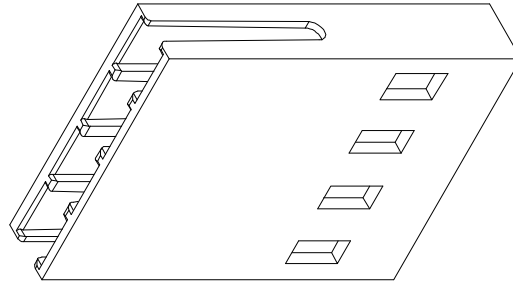


$B \pm 0.25$



14.80 ± 0.25

0.94 ± 0.15

3.00 ± 0.20



7.80 ± 0.20

东莞市晟凯达电子科技有限公司
工程专用章

受控

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Black

Ordering Information

SCT2540MH - xx B BK 115

No.of Pins
See Table

Insulation
B=PA66

Color
BK=Black

10	22.86	25.40	19	45.72	48.26			
9	20.32	22.86	18	43.18	45.72			
8	17.78	20.32	17	40.64	43.18			
7	15.24	17.78	16	38.10	40.64	25	60.96	63.50
6	12.70	15.24	15	33.56	38.10	24	58.42	60.96
5	10.16	12.70	14	33.02	33.56	23	55.88	58.42
4	7.62	10.16	13	30.48	33.02	22	53.34	55.88
3	5.08	7.62	12	27.94	30.48	21	50.80	53.34
2	2.54	5.08	11	25.40	27.94	20	48.26	50.80
Poles	A	B	Poles	A	B	Poles	A	B
	Dimensions			Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.06	Changed from SCT2540MH-xxP to SCT2540MH-xxBBK115			X.X	±0.35			UNIT	mm		
AO	2019.10.15	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2021.07.06	SHEET	1/1		
					Angle	± 3'			PART NO.	SCT2540MH-xxBBK115		
					DIM	TOL		2021.07.06	PROJ.		TITLE:	AMP543 2.54mm Pitch Male Housing Connector