
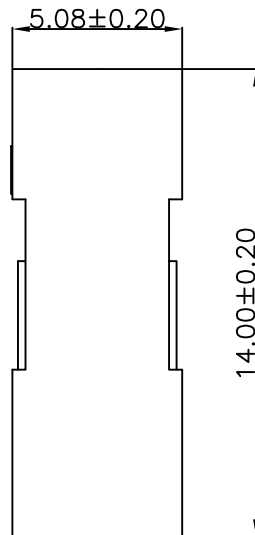
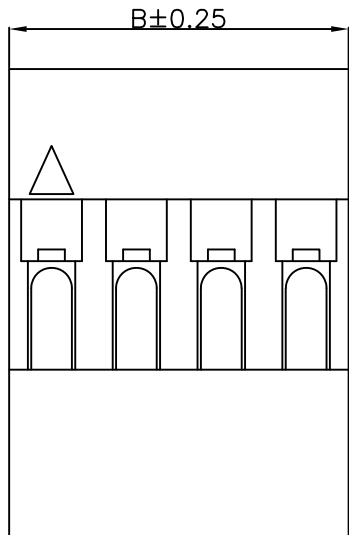
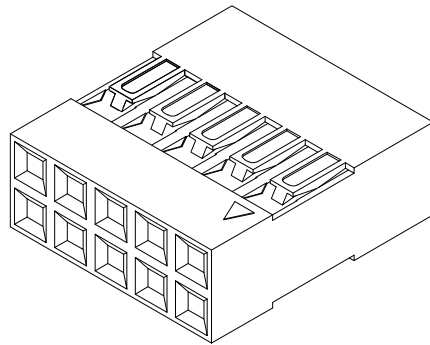


RoHS

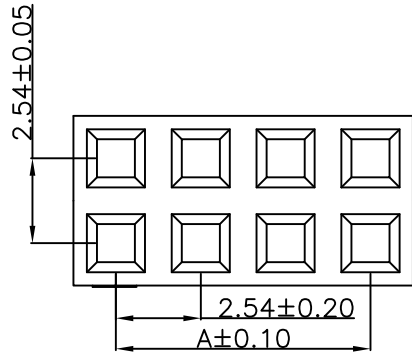

东莞市晟明达电子科技有限公司  
工程专用章

受控

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PBT (UL94V-2)
- Color: Black

Ordering Information

SCT2543H -2xx D BK 116

No. of Pins  
See Table

Insulation  
D=PBT

Color  
BK=Black

2*40	99.06	101.60
2*39	96.52	99.06
2*38	93.98	96.52
2*4	7.62	10.16
2*3	5.08	7.62
2*2	2.54	5.08
Poles	A	B
	Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
A1	2021.07.07	Changed from SCT2543H-2xxP to SCT2543H-2xxDBK116	_____	_____	X.X	±0.35			UNIT	mm			
AO	2019.10.15	NEW	_____	_____	X.XX	±0.25	Lisa	2021.07.07	SIZE	A4			
					X.XXX	±0.15	Allen	2021.07.07	SHEET	1/1			
					Angle	± 3'			PROJECT	⊕	PART NO.	SCT2543H-2xxDBK116	
					DIM	TOL			TITLE:		Dupont 2.54mm Pitch Housing Connector		