RoHS

东莞市诚凯达电子科技有限公司
工程专用章

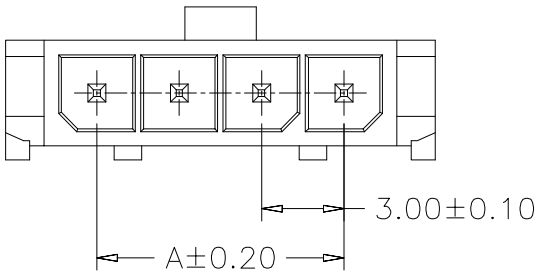

Recommended P.C.B Layout
General Tolerance±0.05

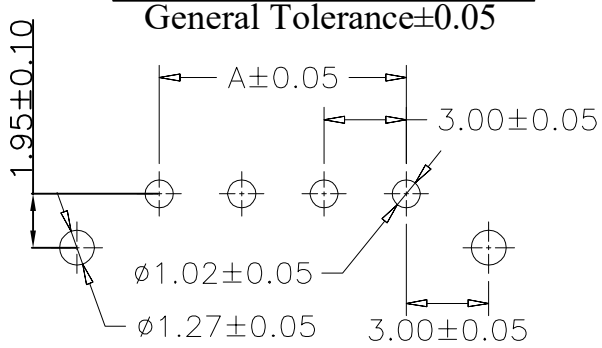

受控

Specification:
-Current Rating: 5A AC/DC
-Voitage Rating: 250V AC/DC
-Insulation Resistance: 1000MΩ Min
-Withstanding Voltage: 1500VAC Min
-Contact resistance: 20mΩ(Max).
-Operation Temperature: -25℃ to +85℃

Material:
-Insulator (Housing): Nylon 66 (UL94V-2)
-Contacts: Brass
-Solder: Tin Plated
-Color: Black

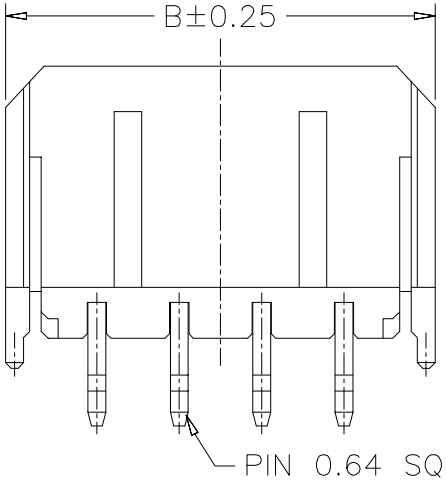

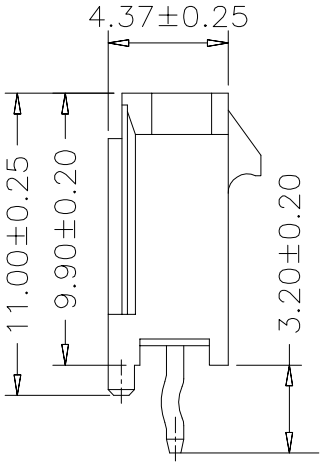

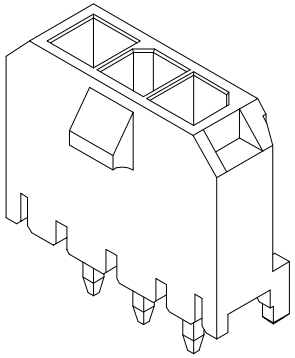

Ordering Information

SCT3001WV - ** B 0 BK 108

- ** : No.of Pins See Table
- B : Insulation B=PA66
- 0 : Package 0=PE Bag
- BK : Color BK=Black

10	27.00	33.65			
9	24.00	30.65			
8	21.00	27.65			
7	18.00	24.65			
6	15.00	21.65			
5	12.00	18.65			
4	9.00	15.65			
3	6.00	12.65	12	33.00	39.65
2	3.00	9.65	11	30.00	36.65
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	2021.07.10	Changed from SCT3001WR-xxP to SCT3001WR-xxB0BK108		
A0	2019.10.15	NEW		

OPERATION				
X.X	±0.35	DRAW	Yang	2022.06.20
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK	Lisa	2022.06.20
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	—
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR
SCONDAR ELECTRONIC LIMITED

PART NO. SCT3001WV-xxB0BK108 A1

TITLE: MX3.0 180° Wafer Connector