RoHS



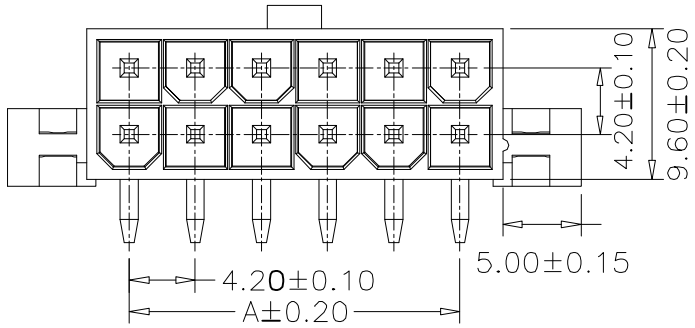

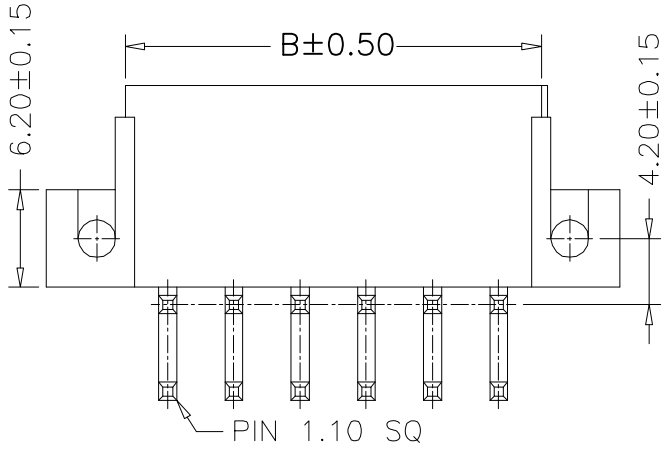

Recommended P.C.B Layout

General Tolerance±0.05

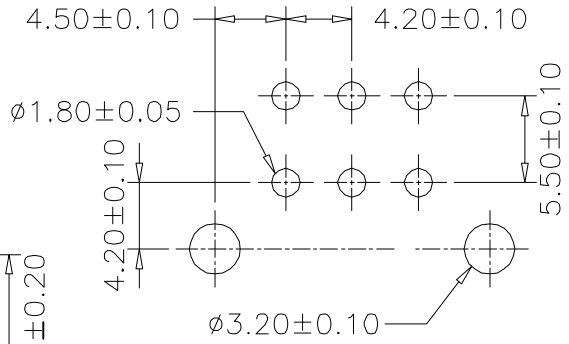

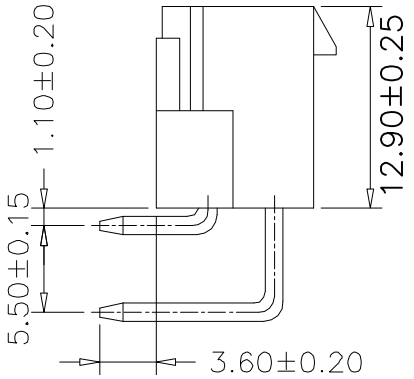

Specification:

-Current Rating: 9A AC/DC
-Voitage Rating: 600V AC/DC
-Insulation Resistance: 1000MΩ(Min)
-Contact resistance: 20mΩ(Max).
-Withstanding Voltage: 1500VAC(Min)
-Operation Temperature: -25℃ to +85℃

Material:

-Insulator Material: Nylon 66(UL94V-2)
-Contact Material: Brass
-Finish: Tin Plated
-Color: Natural

Ordering Information

SCT4201WRE-2xx C 0 NA 103

No.of Pins See Table	Material C=PA66 V2	Package 0=PE Bag	Color NA=Natural

2x09	33.60	39.00			
2x08	29.40	34.80			
2x07	25.20	30.60			
2x06	21.00	26.40			
2x05	16.80	22.20			
2x04	12.60	18.00			
2x03	8.40	13.80	2x12	46.20	51.60
2x02	4.20	9.60	2x11	42.00	47.40
2x01	——	5.40	2x10	37.80	43.20
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

受控

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	2021.07.10	Changed from SCT4201WR-E-2xXP to SCT4201WRE-2xxC0NA103	——	——
A0	2020.03.03	NEW	——	——

OPERATION				
X.X	±0.35	DRAW	Peng	2021.07.10
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK	Lisa	2021.07.10
Angle	± 3°	APPROVE	Allen	2021.07.10
DIM	TOL			

SCALE	—
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR ELECTRONIC LIMITED

PART NO.	SCT4201WRE-2xxC0NA103 A1
TITLE:	MX4.2 90° Wafer