




RoHS

Specification:

- Current Rating: 10A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C
- Contact resistance: 20mΩ(Max)

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: Black

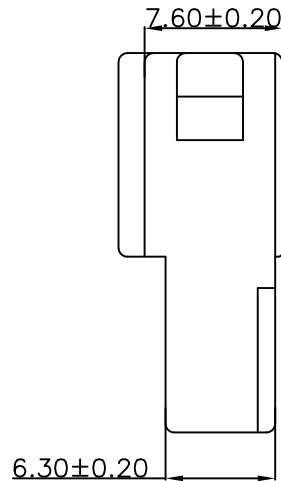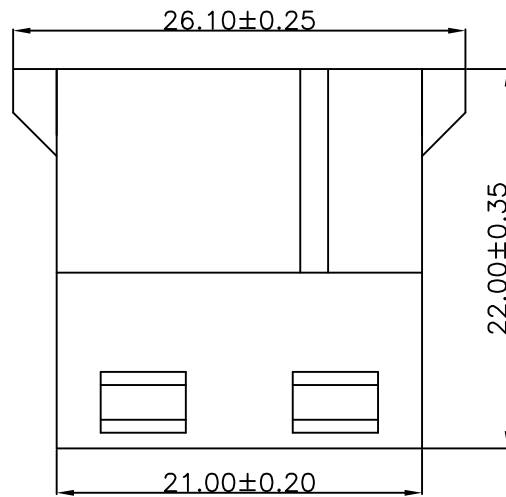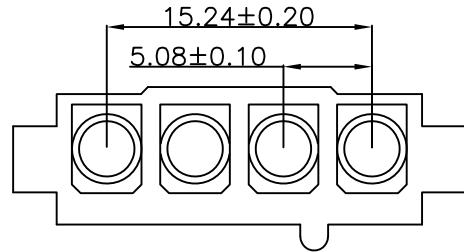


Ordering Information



SCT5083MH - 04 C BK 134

No.of Pins
04Pin

Insulation
C=PA66 V2

Color
BK=Black

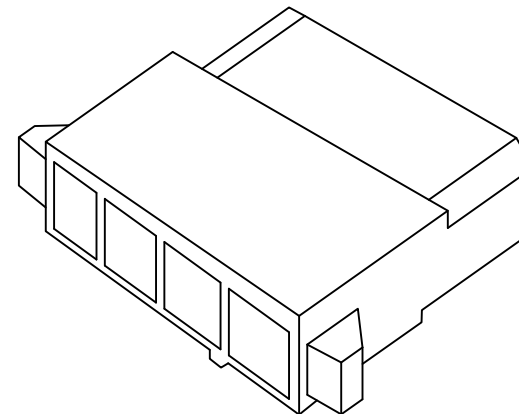

					OPERATION	DRAW	Peng	2021.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.12	Changed from SCT5083MH-04P to SCT5083MH-04CBK134			X.XX ±0.25		CHECK	Lisa	2021.07.12	SIZE		A4
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.12	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE	Allen	2021.07.12	PROJ.		TITLE:	MX8981 Male Housing Connector