
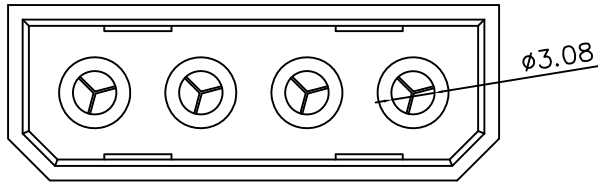


RoHS

Recommended P.C.B Layout
General Tolerance±0.05

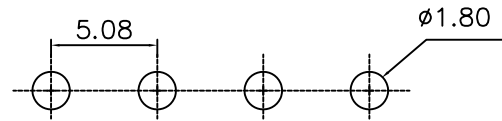

Specification:

- Current Rating: 10A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C
- Contact resistance: 20mΩ(Max)




Material:



- Insulator (Housing): Nylon 66 (UL94V-2)
- Pin: Brass, Tin Plated
- Color: White

Ordering Information

SCT5083WVA - 04 C 0 WT 103

No.of Pins: 04Pin
Material: C=PA66 V2
Package: 0=PE Bag
Color: WT=White

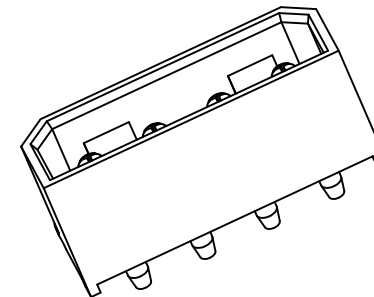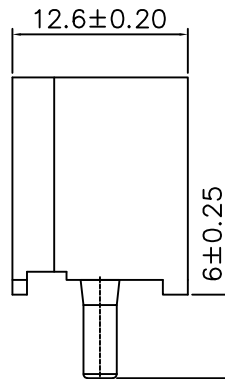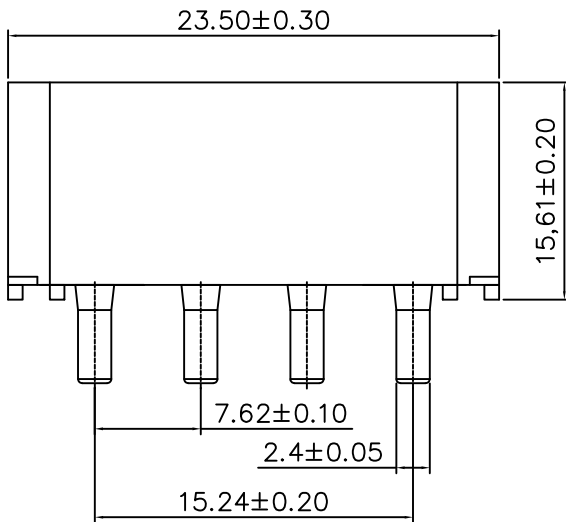

					OPERATION	DRAW	Peng	2021.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.12	Changed from SCT5083WVA-04P to SCT5083WVA-04COWT103			X.XX ±0.25		CHECK	Lisa	2021.07.12	SIZE	
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.12	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM ± 3'	TOL			PROJ.		TITLE: MOLEX8981 180° Wafer Connector