


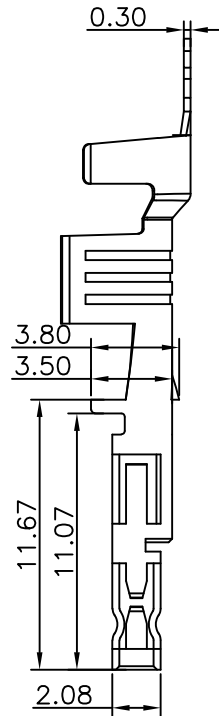


RoHS

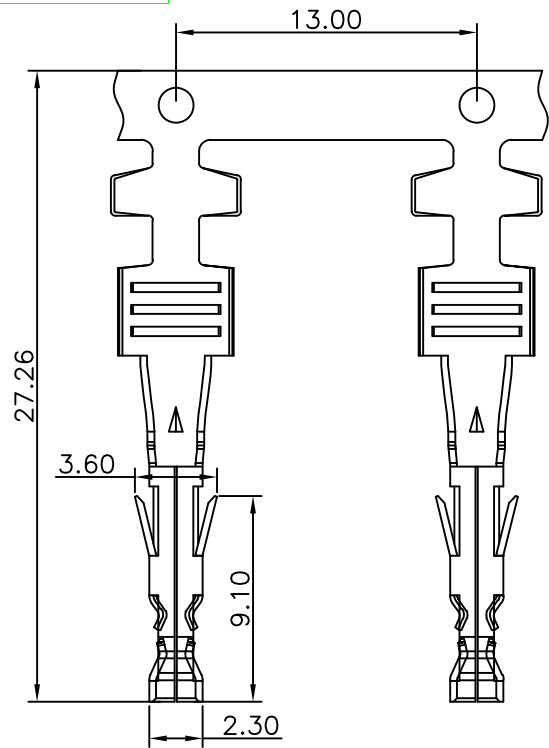


SECTION:H-H




SECTION:J-J

Conductor And In
Insulation 14-16AWG

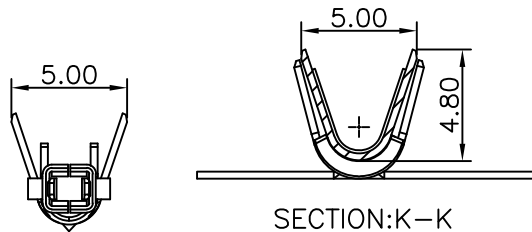

SECTION:K-K

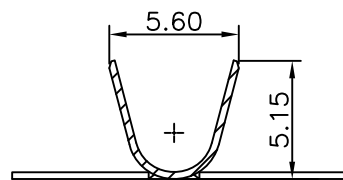

SECTION:L-L

Conductor And Insulation 12AWG

Specification:

- Current Rating: 23A AC/DC
- Voitage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 2mΩ(Max).
- Withstanding Voltage: 2200VAC(Min)
- Operation Temperature: -40℃ to +105℃

Material:

- Wire Range:12AWG~16AWG
- Insulation O.D: 4.00mm Max
- Material: Brass,T=0.3mm
- Finish: Tin Plated/Gold Plated

Ordering Information

SCT5700FT B x 151

Material:
B=Brass

Contact Plated
S=Tin Plated
G=Gold Plated

Current rating				
AWG & Metric wire size	2	4	6	8~
12 AWG, 4.0mm ²	23 A	20 A	18 A	16
14 AWG, 2.5mm ²	21 A	17 A	15 A	13
16 AWG, 1.5mm ²	17 A	15 A	13 A	12

					OPERATION		DRAW	Peng	2020.10.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35	DESIGN			UNIT	mm		
					X.XX	±0.25				SIZE	A4		
AO	2020.10.15	NEW	—	—	X.XXX	±0.15	CHECK	Lisa	2020.10.15	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE	Allen	2020.10.15	PROJ.		TITLE:	MX 171692/170001 5.70mm Pitch Female Terminal
					DIM	TOL							