



RoHS

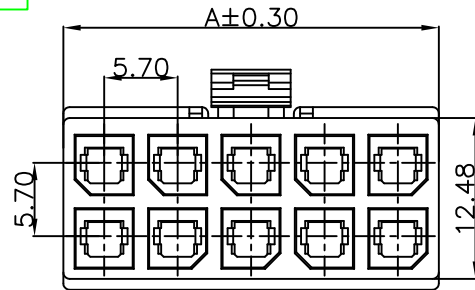

Specification:

- Current Rating: 23A AC/DC
- Voltage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 2200VAC(1Min)
- Contact resistance: 2mΩ(Max).
- Operation Temperature: -40℃ to +105℃

Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: Black


Ordering Information

SCT5700H -2xx B BK 151


No.of Pins
See Table

Insulation
B=PA66


Color
BK=Black




2x01P




2x02P




2x03P



2x04P



2x05P



2x06P

2*06	34.85
2*05	29.15
2*04	23.45
2*03	17.75
2*02	12.05
2*01	8.35
Poles	A
	Dimensions

					OPERATION	DRAW	Peng	2020.10.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
					X.XXX ±0.15	CHECK	Lisa	2020.10.15	SHEET	1/1	PART NO.	SCT5700H-2xXBBK151
AO	2020.10.15	NEW			Angle ± 3°	APPROVE	Allen	2020.10.15	PROJ.		TITLE:	MX 171692/170001 5.70mm Pitch Housing Connector
REV	DATE	MODIFICATION DESCRIPTION			DIM TOL							