




RoHS

Recommended P.C.B Layout
General Tolerance±0.05

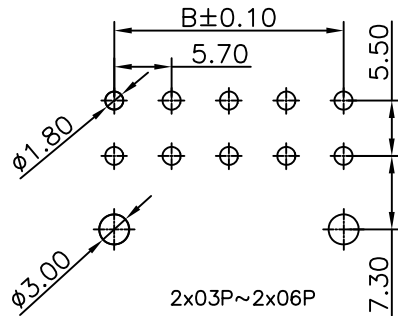

Specification:

- Current Rating: 16A AC/DC
- Voltage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 2mΩ(Max).
- Withstanding Voltage: 2200VAC(Min)
- Operation Temperature: -40°C to +105°C






Material:

- Insulator Material: LCP(UL94V-0)
- Contact Material: Brass
- Finish: Tin Plated
- Color: Black

Ordering Information

SCT5700WRF - xx F 0 BK 151

No.of Pins See Table Material F=LCP Package 0=PE Bag Color BK=Black

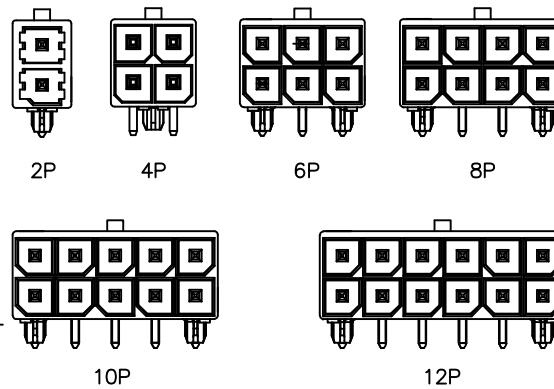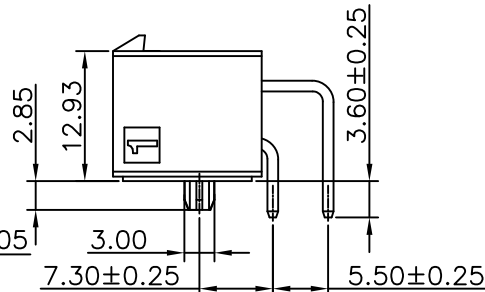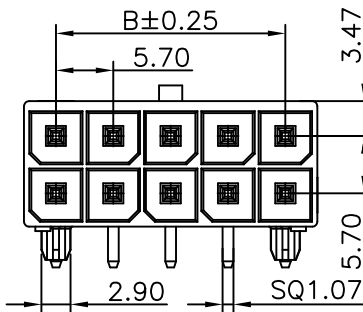

Poles	A	B
2*6	34.85	28.50
2*5	29.15	22.80
2*4	23.45	17.10
2*3	17.75	11.40
2*2	12.05	5.70
2*1	8.35	
	Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2020.03.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED
AO	2020.03.03	NEW			X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
					Angle	± 3'			PART NO.	SCT5700WRF-xxF0BK151	
					DIM	TOL			PROJ.	⊕	
									TITLE:	5.70mm Crimp Style Connectors	