

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 23A AC/DC
- Voltage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 2mΩ(Max).
- Withstanding Voltage: 2200VAC(Min)
- Operation Temperature: -40℃ to +105℃

Material:

- Insulator Material: LCP(UL94V-0)
- Contact Material: Brass
- Finish: Tin Plated
- Color: Black

Ordering Information

SCT5700WV - xx F 0 BK 151


No.of Pins
See Table

Material
F=LCP


Package
0=PE Bag

Color
BK=Black






2*6	34.85	28.50	38.84
2*5	29.15	22.80	33.14
2*4	23.45	17.10	27.44
2*3	17.75	11.40	21.74
2*2	12.05	5.70	16.04
2*1	8.35	12.34	
Poles	A	B	C
	Dimensions		

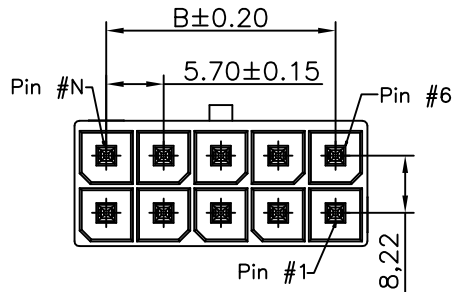


2x02P~2x06P 视图



2x01P 视图

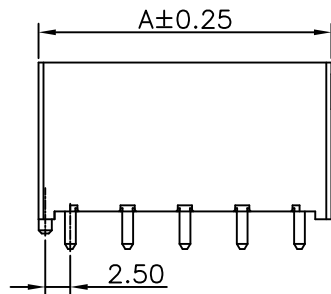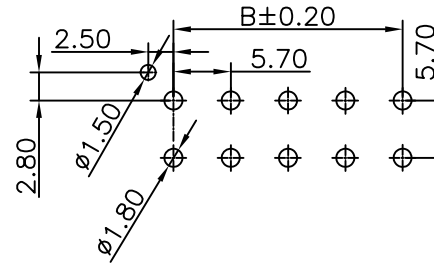


2x01P





2x06P

2x02P



2x05P

2x03P



2x04P

					OPERATION	DRAW	Peng	2020.03.03	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
					X.XXX ±0.15	CHECK	Lisa	2020.03.03	SHEET	1/1	PART NO.	SCT5700WV-xxF0BK151
AO	2020.03.03		NEW		Angle ± 3'	APPROVE	Allen	2020.03.03	PROJ.	1/1	TITLE: 5.70mm Crimp Style Connectors	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM TOL							