

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:




- Insulator (Housing): PBT(UL94V-0)
- Color: White


Ordering Information

SCT1001HA- ** D WT 104

No. of Pins See Table
Insulation D=PBT
Color WT=White

11	10.0	11.40	11.80				
10	9.00	10.40	10.80	20	19.0	20.40	20.80
9	8.00	9.40	9.80	19	18.0	19.40	19.80
8	7.00	8.40	8.80	18	17.0	18.40	18.80
7	6.00	7.40	7.80	17	16.0	17.40	17.80
6	5.00	6.40	6.80	16	15.0	16.40	16.80
5	4.00	5.40	5.80	15	14.0	15.40	15.80
4	3.00	4.40	4.80	14	13.0	14.40	14.80
3	2.00	3.40	3.80	13	12.0	13.40	13.80
2	1.00	2.40	2.80	12	11.0	12.40	12.80
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

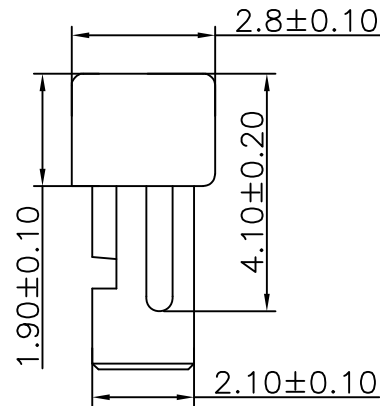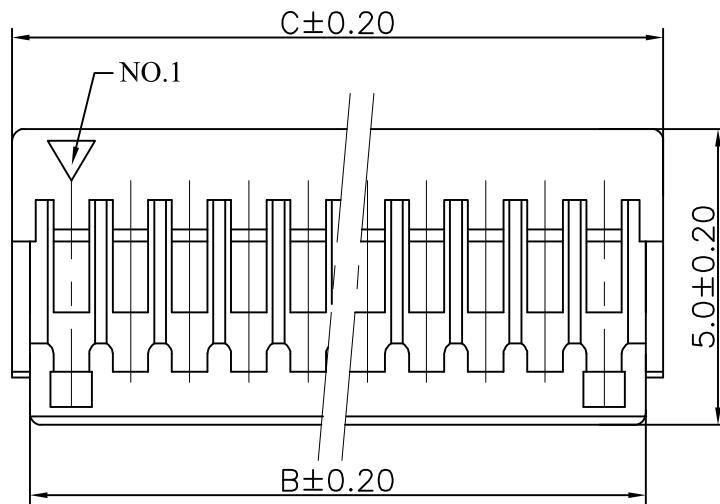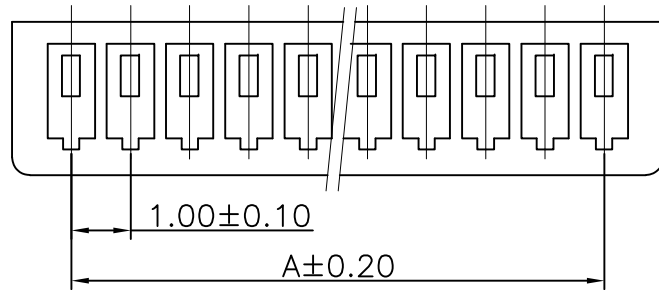

					OPERATION	DRAW	Peng	2021.07.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35			UNIT	mm			
A1	2021.07.02	Changed from SCT1001HA-xxP to SCT1001HA-xxDWT104			X.XX	±0.25			SIZE	A4			
AO	2006.05.02	NEW			X.XXX	±0.15		2021.07.02	SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'		2021.07.02	PROJ.	⊕	PART NO.	SCT1001HA-xxDWT104	⚠
					DIM	TOL	APPROVE	Allen			TITLE:	SH 1.0mm Housing	