


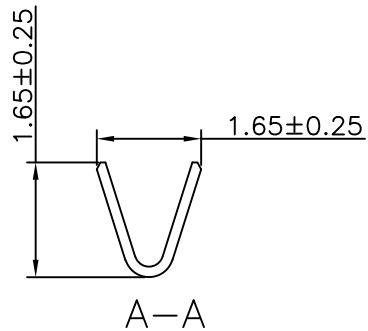
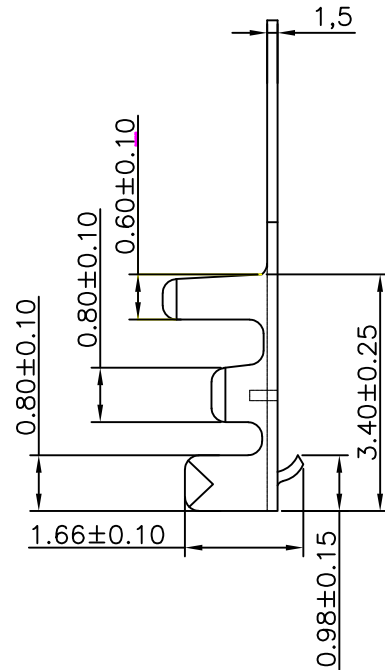


RoHS

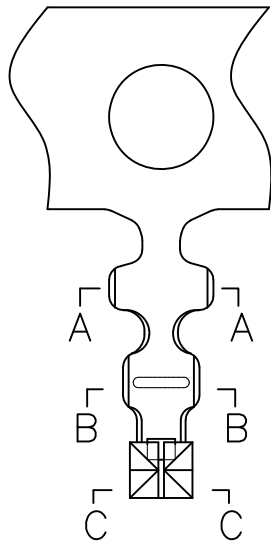

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 100MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 500VAC(Min)
- Operation Temperature: -40°C to +85°C


Material:

- Applicable Wires: 32AWG~28AWG
- Material: Phosphor Bronze ,T=0.15mm
- Finish: Tin Plated

Ordering Information

SCT1251FT P S 126

Material:
P=Phosphor Bronze Contact Plated
S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2021.07.05	SIZE		A4
					X.XXX ±0.15	APPROVE	Allen	2021.07.05	SHEET	1/1		PART NO.
A1	2021.07.05	Changed from SCT1251-TP to SCT1251FTPS126			Angle ± 3'				PROJ.	⌀	TITLE:	MX 1.25mm Pitch Female Terminal
AO	2021.03.03	NEW			DIM TOL							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE							