

RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White




Ordering Information

SCT1251MH - xx B WT 104




No.of Pins
See Table

Insulation
B=PA66

Color
WT=White

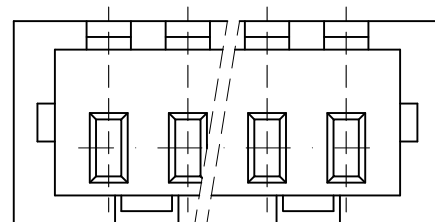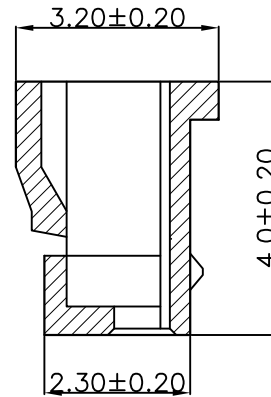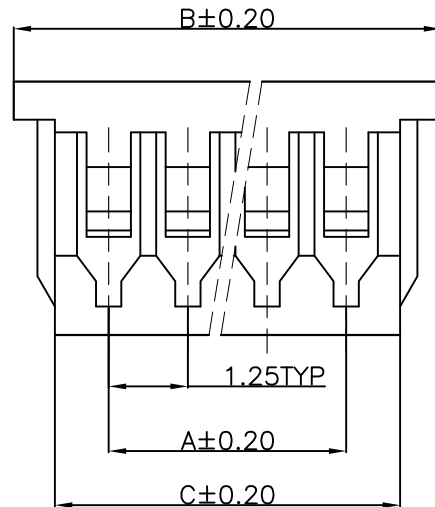

11	12.50	15.50	14.20				
10	11.25	14.25	12.95				
9	10.00	13.00	11.70				
8	8.75	11.75	10.45				
7	7.50	10.50	9.20				
6	6.25	9.25	7.95	16	18.75	21.75	20.45
5	5.00	8.00	6.70	15	17.50	20.50	19.20
4	3.75	6.75	5.45	14	16.25	19.25	17.95
3	2.50	5.50	4.20	13	15.00	18.00	16.70
2	1.25	4.25	2.95	12	13.75	16.75	15.45
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.05	Changed from SCT1251H-xxP to SCT1251MH-xxBWT104			X.X	DESIGN			UNIT	mm		
AO	2006.05.02	NEW			X.XX	CHECK	Lisa	2021.07.05	SIZE	A4		
					X.XXX	APPROVE	Allen	2021.07.05	SHEET	1/1		
					Angle				PROJ.		PART NO.	SCT1251MH-xxBWT104 
					DIM						TITLE:	MX1.25mm Pitch Male Housing Connector