

RoHS

Recommended P.C.B Layout
General Tolerance±0.05

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +85°C

Material:




- Insulator (Housing): Nylon 9T (UL94V-0)
- Contacts:Brass,Gold Plated
- Color: Beige


Ordering Information

SCT1252WVSF -2 ** E * BE 101

No.of Pins See Table
Insulation E=PA9T
Package 1=Tape&Reel 2=Tube
Color BE=Beige

2*20	23.75	30.90
2*15	17.50	24.65
2*10	11.25	18.40
2*07	7.50	14.65
2*05	5.00	12.15
Poles	A	B
	Dimensions	

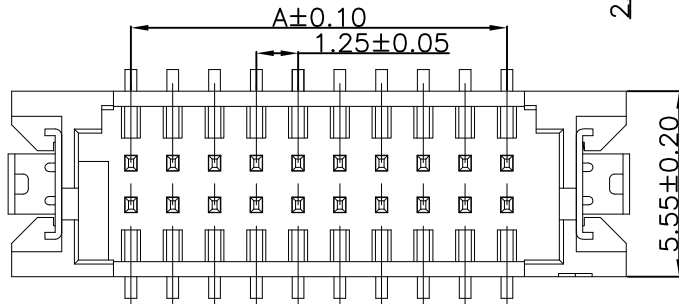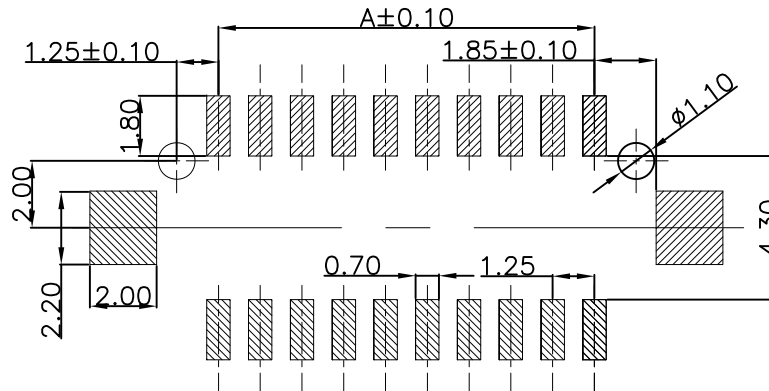

					OPERATION	DRAW	Peng	2021.07.02	SCALE		 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.02	Changed from SCT1252WV-S-F-2xxP to SCT1252WVSF-2xxExBE101			X.XX ±0.25		CHECK	Lisa	2021.07.02	SIZE		A4
AO	2006.05.02	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.02	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				PROJ.	⌀	TITLE:	DF13 1.25mm 90° SMT Wafer