

RoHS

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 150V AC/DC
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 30mΩ(Max).
- Operation Temperature: -35°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Beige


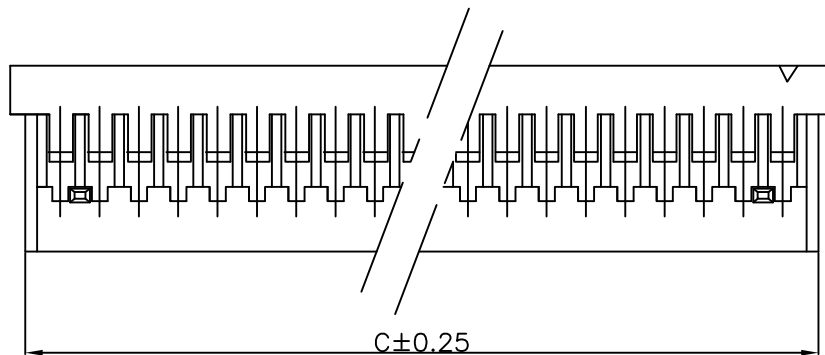
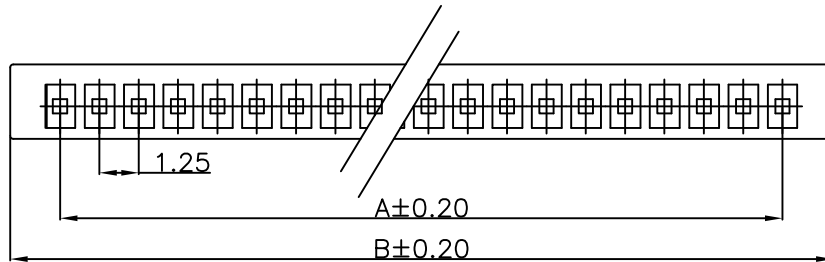
**Ordering Information**

SCT1253H - xx B BE 104



No.of Pins  
See Table

Insulation  
B=PA66

Color  
BE=Beige



10	11.25	14.65	13.65				
9	10.00	13.40	12.40				
8	8.75	12.15	11.15				
7	7.50	10.90	9.90				
6	6.25	9.65	8.65				
5	5.00	8.40	7.40	30	36.25	39.65	38.65
4	3.75	7.15	6.15	25	30.00	33.40	32.40
3	2.50	5.90	4.90	20	23.75	27.15	26.15
2	1.25	4.65	3.65	15	17.50	20.90	19.90
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.05	Changed from SCT1253H-xxP to SCT1253H-xxBBE104			X.X	±0.35			UNIT	mm	
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
					Angle	± 3'			PART NO.	SCT1253H-xxBBE104	
					DIM	TOL	APPROVE	Allen	2021.07.05	PROJ.	DF14 1.25mm Pitch Housing Connector