

RoHS

Recommended P.C.B Layout  
General Tolerance±0.05

- Specification:
- Current Rating: 2A AC/DC
  - Voltage Rating: 250V AC/DC
  - Insulation Resistance: 1000MΩ Min
  - Withstanding Voltage: 500VAC(1Min)
  - Contact resistance: 20mΩ(Max).
  - Operation Temperature: -40°C to +105°C

- Material:
- Insulator (Housing): Nylon 66 (UL94V-2)
  - Contacts:Copper Alloy
  - Color:White
  - Q'TY: 1000 PCS/Tape&reel

Ordering Information







SCT2001WV - \*\* C 1 WT 108

No. of Pins See Table  
Insulation C=PA66 V2  
Package 1=Tape&reel  
Color WT=White

东莞市晟凯达电子科技有限公司  
工程专用章

受控

10	18.00	22.00			
9	16.00	20.00			
8	14.00	18.00			
7	12.00	16.00	16	30.00	34.00
6	10.00	14.00	15	28.00	32.00
5	8.00	12.00	14	26.00	30.00
4	6.00	10.00	13	24.00	28.00
3	4.00	8.00	12	22.00	26.00
2	2.00	6.00	11	20.00	24.00
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

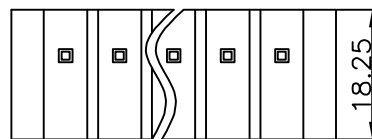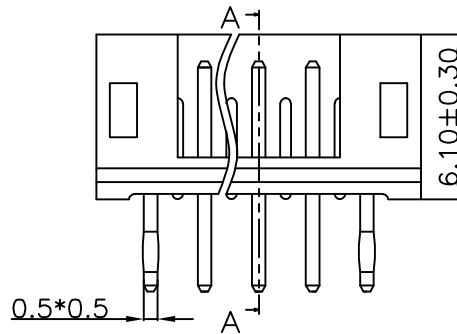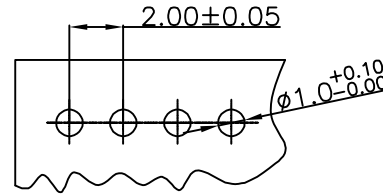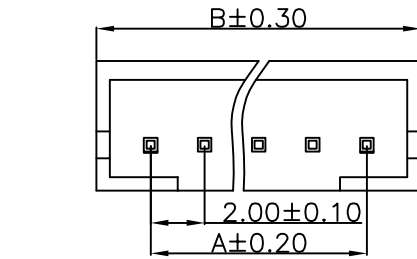

					OPERATION	DRAW	Peng	2010.05.15	SCALE		 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25	CHECK	Lisa	2010.05.15	SIZE	A4		
					X.XXX ±0.15	APPROVE	Allen	2010.05.15	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	APPROVE	Allen	2010.05.15	PROJ.	⊕	PART NO.	SCT2001WV-xxC1WT108
					DIM TOL						TITLE:	PH 2.00mm 180° Wafer