

RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 800VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:

- Wire Range: 24AWG~28AWG
- Insulation O.D: 1.5mm Max
- Material: Brass, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10000Pcs/Reel

Ordering Information


SCT2003TV B S 112

Material:
B=Brass

Contact Plated
S=Tin Plated

东莞市冠凯达电子科技有限公司
工程专用章

受控

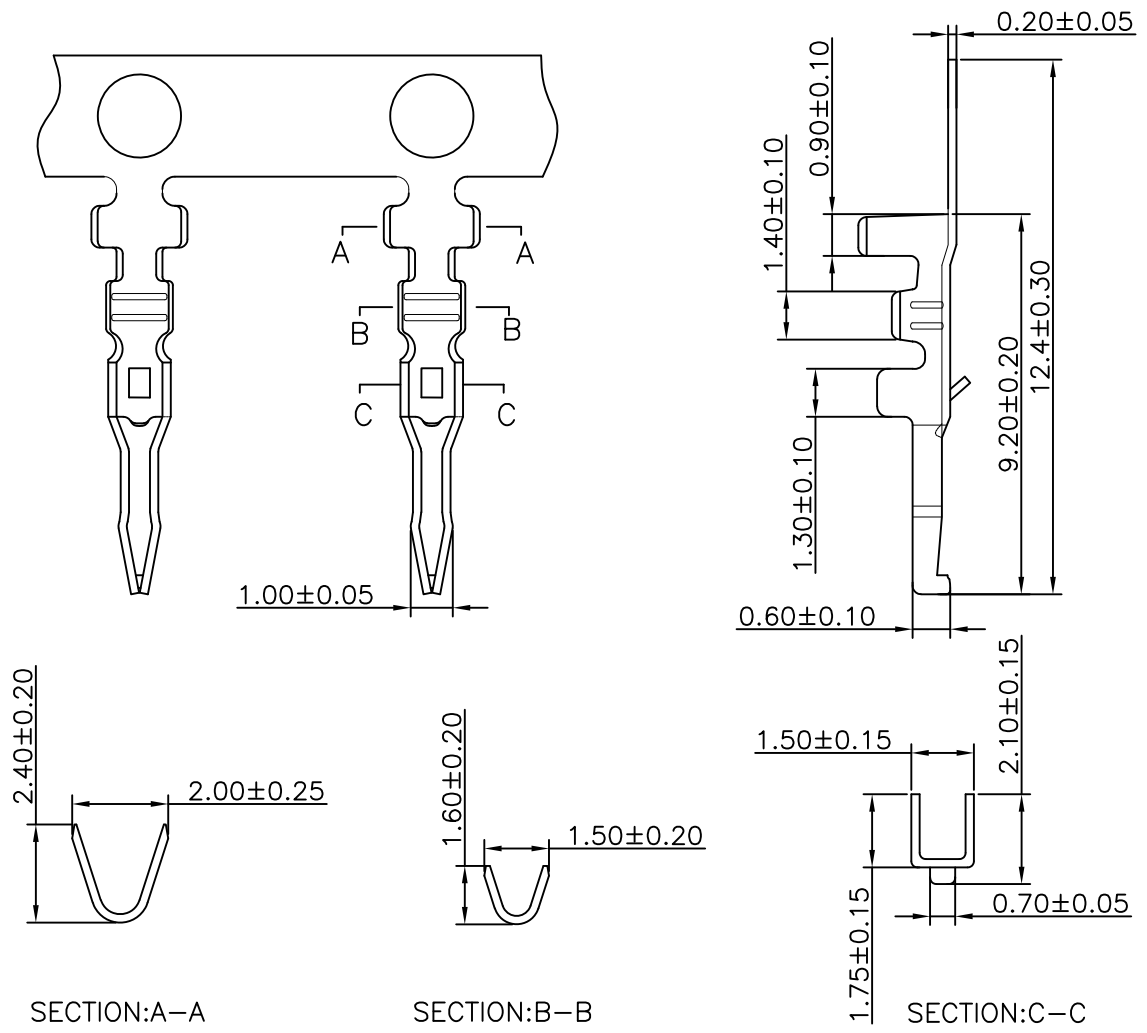

SECTION:A-A

SECTION:B-B

SECTION:C-C

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
A1	2021.07.10	Changed from SCT2003-TVBS to SCT2003TVBS112			X.XX	±0.25			SIZE	A4	
AO	2015.03.03	NEW			X.XXX	±0.15		2021.07.10	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PART NO.	SCT2003TVBS112	
					DIM	TOL	APPROVE	Allen	2021.07.10	PROJ.	⌀
									TITLE:	SAN 2.0mm 180° Terminal	