


RoHS

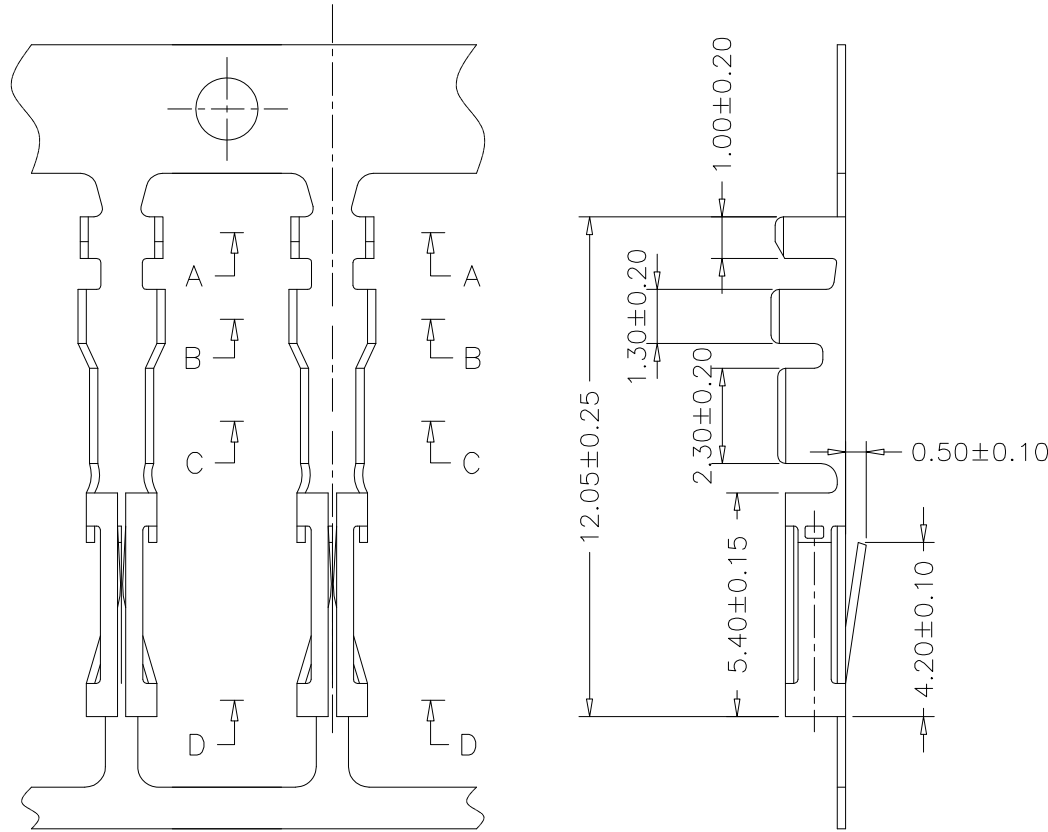

**Specification:**

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1000VAC(Min)
- Operation Temperature: -25°C to +85°C


**Material:**

- Wire Range: 22-26AWG(OD:1.55mm)
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 15,000Pcs/Reel


**Ordering Information**

SCT2542T P S 119


Material:  
P=Phosphor Bronze S=Tin Plated




SECTION:A-A





SECTION:B-B



SECTION:C-C



SECTION:D-D

					OPERATION	DRAW	Peng	2021.07.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.07	Changed from SCT2542-TP-2 to SCT2542TPS119			X.XX ±0.25	CHECK	Lisa	2021.07.07	SIZE	A4	
AO	2018.03.03	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.07	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL			PART NO.	SCT2542TPS119	
									TITLE:	AMP280358 2.54mm Terminal	