

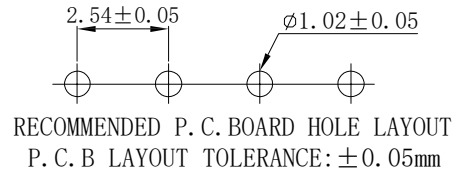
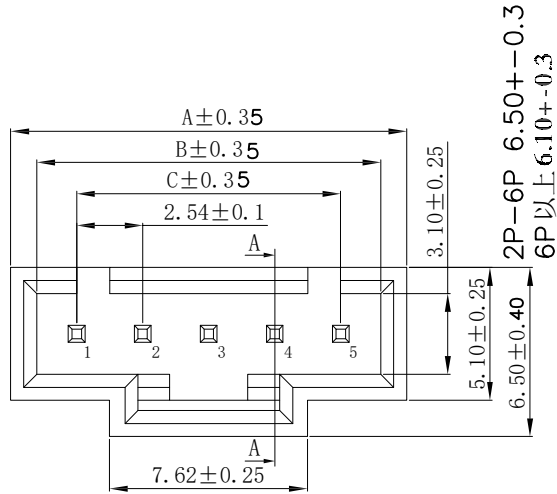
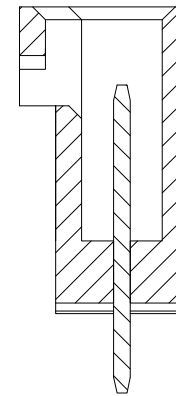


RoHS

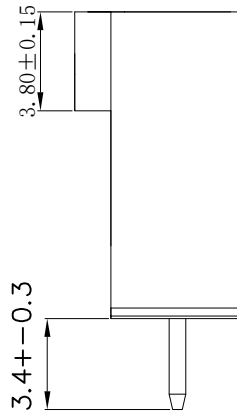

SPECIFICATIONS

Current Rating : 3 Amps  
 Voltage rating : 250V AC, DC  
 Temperature range : 25° C ~ +85° C  
 Contact resistance : 10m ohms Max  
 Insulator Resistance : 1000 Megohms min.  
 Dielectric Withstanding: AC 1000 V  
 Contact Material : Brass  
 Insulator Material : Polyester, UL94V-0  
 Standard : PBT+30%GF  
 Finish : Gold Plated  
 Standard : Gold Flash all over  
 Color : Black

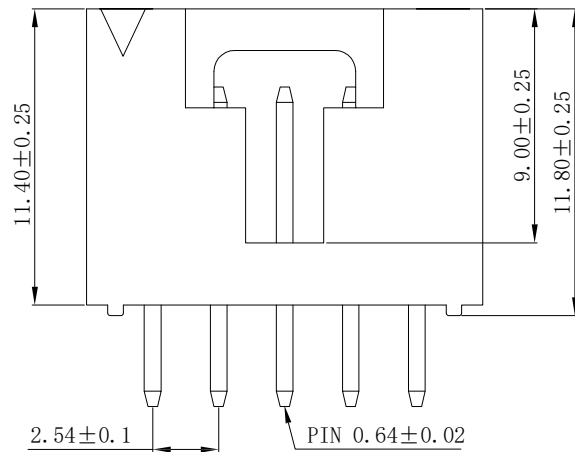

SECTION A-A

东莞市晟凯达电子科技有限公司  
工程专用章

受控

Circuits	A	B	C
02	7.62	5.62	2.54
03	10.16	8.16	5.08
04	12.70	10.70	7.62
05	15.24	13.24	10.16
06	17.78	15.78	12.70
07	20.32	18.32	15.24
08	22.86	20.86	17.78
09	25.40	23.40	20.32
10	27.94	25.94	22.86
11	30.48	28.48	25.40
12	33.02	31.02	27.94
13	35.56	33.56	30.48
14	38.10	36.10	33.02
15	40.64	38.64	35.56
16	43.18	41.18	38.10
17	45.72	43.72	40.64
18	48.26	46.26	43.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	PROJ.	PART NO.	TITLE:
A0	2020.03.03	NEW			X.X	Yang	—	mm	A4	1/1		SCT2544WV-xxDOBK108	
					X.XX								
					X.XXX	Lisa	2020.03.03						
					Angle								
					DIM								
					TOL								

**SCONDAR**  
SCONDAR ELECTRONIC LIMITED