


ROHS

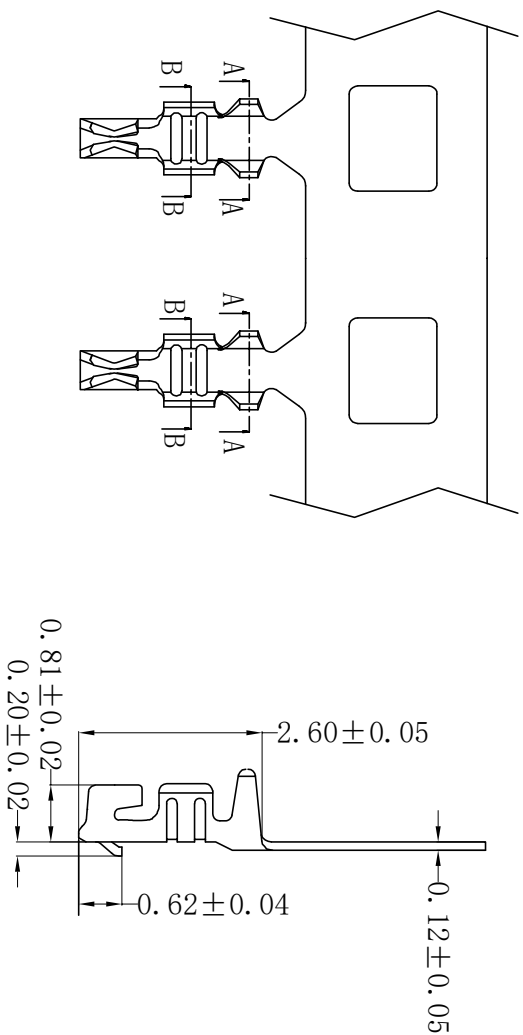


- Specification:
- Current Rating: 0.5A AC/DC
  - Voltage Rating: 30V AC/DC
  - Insulation Resistance: 100MΩ Min
  - Withstanding Voltage: 200VAC(1Min)
  - Contact resistance: 20mΩ(Max).
  - Operation Temperature: -25°C to +85°C
- Material:
- Applicable Wire: AWG#32-36# (OD0.6mm Max)
  - Material: Phosphor Bronze T=0.12mm
  - Finish: Tin Plated

深圳市森康达电子有限公司  
工程专用章

受控

SECTION:B-B

SECTION:A-A



## Ordering Information

SCT0801T P S 110

Material  
Phosphor Bronze

Contact Plated  
S=Tin plated



SCONDAR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION DIM	DESIGN TOL.	DRAW	YANG	2016.06.06	SCALE	UNIT	SHEET	PROJ.	TITLE:
A0	2016.06.06	NEW			X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3°	DESIGN ±0.20 ±0.10	CHECK	ZHONG	2016.06.06	1/1	A4	1/1		Part No SCT0801T P S 110 0.80mm Pitch for SCT0800H Crimp Terminal Phosphor Bronze Tin(Sn) Plating 30-32AWG Reel MPQ=30KPCS