
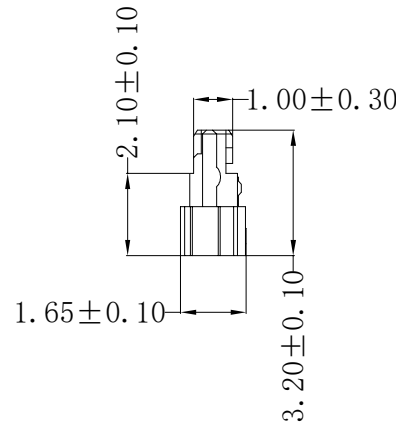
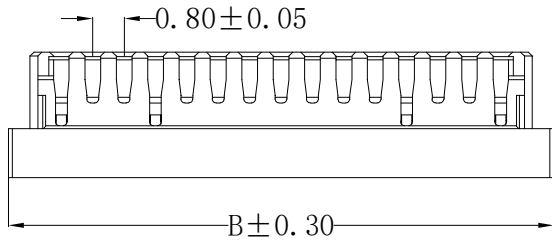


RoHS

Specification:

- Current Rating: 1A AC/DC
 - Voltage Rating: 30V AC/DC
 - Insulation Resistance: 100MΩ Min
 - Withstanding Voltage: 200VAC(1Min)
 - Contact resistance: 20mΩ(Max).
 - Operation Temperature: -40°C to +85°C
- Material:
- Insulator (Housing): PA4T (UL94-V0)
 - Color: Black

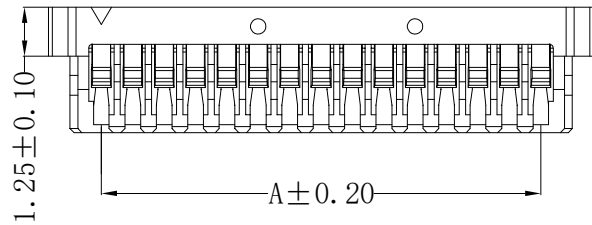

Ordering Information

SCT0802H - xx S BK 164

No. of Pins See Table Insulation S=PA4T V0 Color BK=Black

Dimensions		Part NO	PIN
A	B		
0.80	3.50	SCT0802H-02SBK164	2
1.60	4.30	SCT0802H-03SBK164	3
2.40	5.10	SCT0802H-04SBK164	4
3.20	5.90	SCT0802H-05SBK164	5
4.00	6.70	SCT0802H-06SBK164	6
5.60	8.30	SCT0802H-08SBK164	8
7.20	9.90	SCT0802H-10SBK164	10
8.80	11.50	SCT0802H-12SBK164	12
10.40	13.10	SCT0802H-14SBK164	14
11.20	13.90	SCT0802H-15SBK164	15
12.00	14.70	SCT0802H-16SBK164	16
12.80	15.60	SCT0802H-17SBK164	17
15.20	17.90	SCT0802H-20SBK164	20

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.30	DESIGN			UNIT	mm		
					X.XX ±0.20		CHECK	Lisa	2016.06.06	SIZE		A4
AO	2016.06.06	NEW	—	—	X.XXX ±0.10	APPROVE				SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	⌀	TITLE:	0.80mm Pitch Wire to Board Housing xx Circuits PA4T V0 Black
					DIM TOL							