
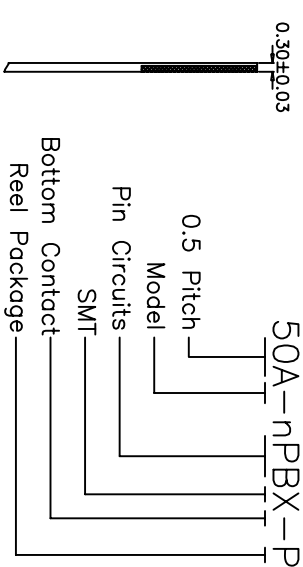
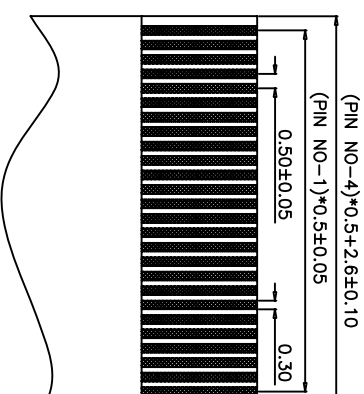
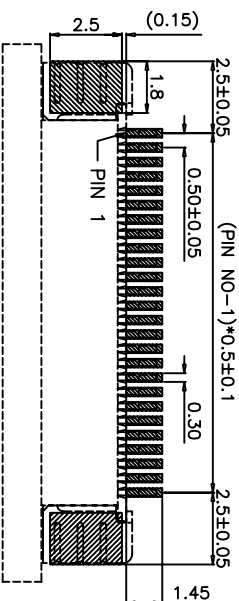


SPECIFICATIONS

Voltage Rating: 50V AC/DC
Current Rating: 0.5A AC/DC
Withstanding Voltage: 500V AC/minute
Insulation Resistance: 500MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 30mΩ max
Poles: 4-60

MATERIAL

1. Housing: Nylon46 UL94V-0
2. Locker: PPS, UL94V-0
3. Contact: Phosphor bronze, Tin plated
4. Solder tab: Phosphor bronze, Tin plated

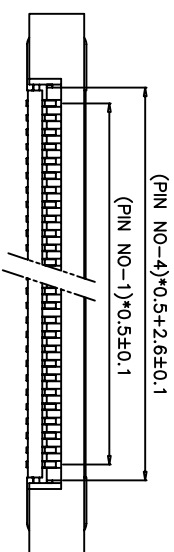

PCB LAYOUT

APPLICABLE FFC

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

OPERATION		DRAW		CHENA		SCALE		PART NO.		50A-NPBX	
~ 10 ±0.15		DESIGN				mm					
20 ~ 30 ±0.30											
30 ~ ±0.50		CHECK		Micky		14/09/18		SHEET		0.5mm Pitch "A" Bottom Contact FPC	
Angle ± 2°											
DIM TOL		APPROVE		HELLEN		14/09/18		PROJ.		DRAWING NO.	
										50A-NPBX	

REV 0 05/12/27 NEW

DATE MODIFICATION DESCRIPTION

CHANGE APPROVE

APPROVE

HELLEN

14/09/18

PROJ.

DRAWING NO.

50A-NPBX

50A-NPBX

50A-NPBX

50A-NPBX