


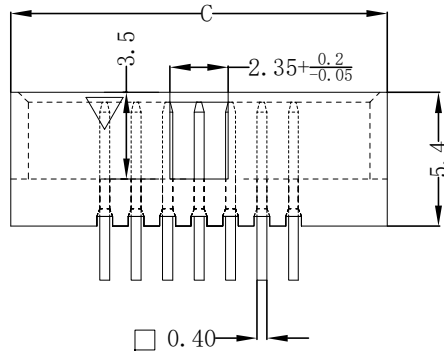


RoHS

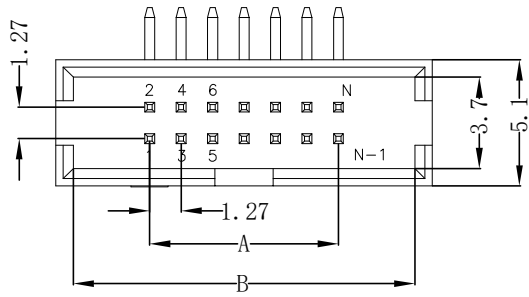

Recommended PCB Layout


NOTES

- Insulator Material: Nylon-6T,UL94V-0
- Contact Plating: Flash Gold
- Contact Material: Brass
- Current Rating: 1A AC,DC
- Contact Resistance: 20mΩ Max
- Withstanding: 500V AC
- Insulator Resistance: 1000mΩ Min
- Operating Temp: -40° C~+105° C

东莞市晟凯达电子科技有限公司
工程专用章

受控

MATING PART



NUMBER OF POSITIONS	DIMENSIONS		
	A	B	C
10	5.08	11.25	12.65
14	7.62	13.79	15.19
16	8.89	15.06	16.46
20	11.43	17.60	19.00
26	15.24	21.41	22.81
30	17.78	23.95	25.35
34	20.32	26.49	27.89
40	24.13	30.30	31.70
50	30.48	36.65	38.05
60	36.83	43.00	44.40

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
AO	2016.06.06	NEW	—	—	X.XXX ±0.15	CHECK	Lisa	2016.06.06	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	DIM	TOL	APPROVE	PROJ.	⌀	TITLE:	BH1.27 H=5.4 2xXXPin Gold PA6T BK RT Box Header