
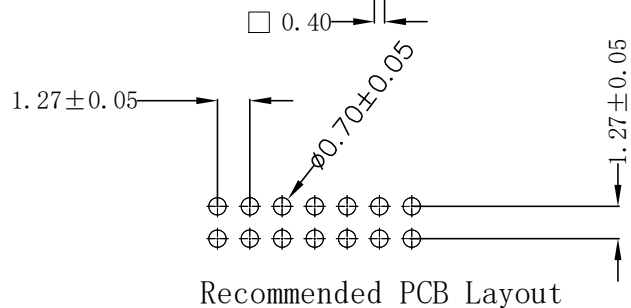

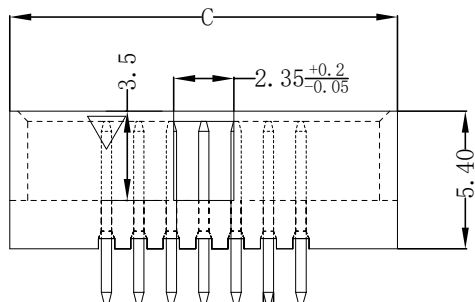


RoHS

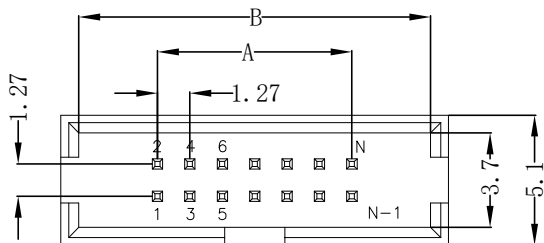

NOTES


Insulator Material: Nylon-6T, UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brass
 Current Rating: 1A AC, DC
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC
 Insulator Resistance: 1000mΩ Min
 Operating Temp: -40° C ~ +105° C

东莞市晟凯达电子科技有限公司
 工程专用章

受控

NUMBER OF POSITIONS	DIMENSIONS		
	A	B	C
10	5.08	11.25	12.65
14	7.62	13.79	15.19
16	8.89	15.06	16.46
20	11.43	17.60	19.00
26	15.24	21.41	22.81
30	17.78	23.95	25.35
34	20.32	26.49	27.89
40	24.13	30.30	31.70
50	30.48	36.65	38.05
60	36.83	43.00	44.40

MATING PART



					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2016.06.06	SIZE		A4
A0	2016.06.06	NEW	—	—	X.XXX ±0.15	APPROVE				SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.	⌀	TITLE:	BH1.27 H=4.5 2xXXPin Gold PA6T BK ST Box Header
					DIM TOL							