
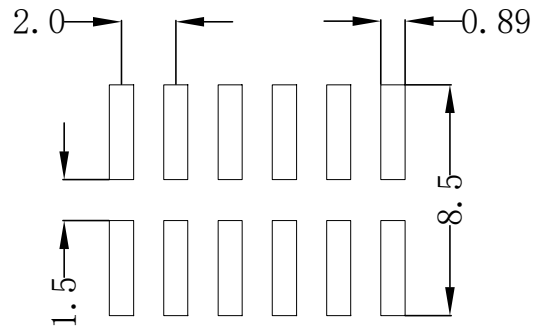




RoHS

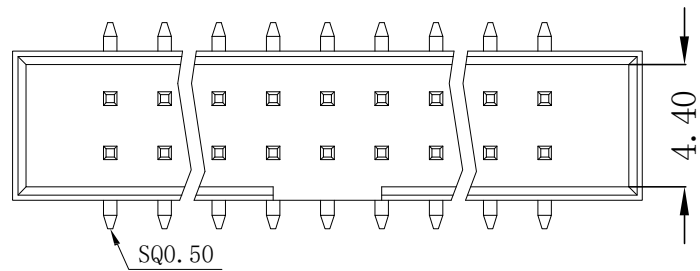

P. C. Board Hole Layout Recommended

SPECIFICATIONS

Current Rating: 3AMPS
 Insulator resistance:5000 megohms min
 Dielectric Withstaanding:500V AC
 Operating Temperature: -40° C~+105° C
 Insulator Material: PA6T UL94V-0
 Conract Material:Brass
 Plating: Gold flash

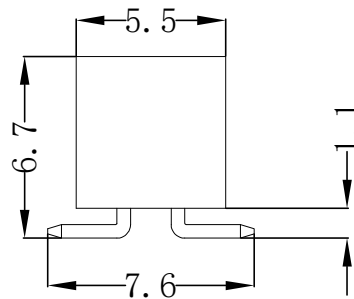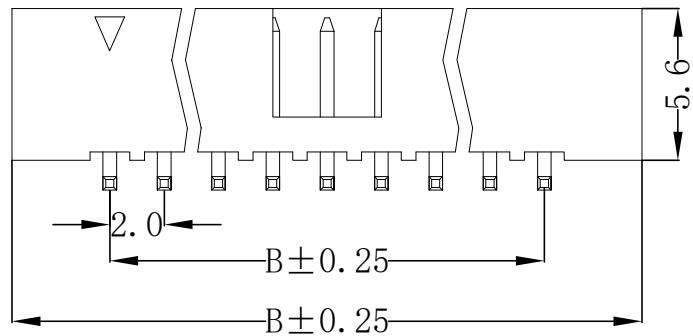

Cir-cuits	Dimension mm	
	A	B
2X4	6.0	15.2
2X5	8.0	17.2
2X6	10.0	19.2
2X7	12.0	21.2
2X8	14.0	23.2
2X9	16.0	25.2
2X10	18.0	27.2
2X11	20.0	29.2
2X12	22.0	31.2
2X13	24.0	33.2
2X14	26.0	35.2
2X15	28.0	37.2
2X16	30.0	39.2
2X17	32.0	41.2
2X18	34.0	43.2
2X19	36.0	45.2
2X20	38.0	47.2
2X21	40.0	49.2
2X22	42.0	51.2
2X23	44.0	53.2
2X24	46.0	55.2
2X25	48.0	57.2
2X26	50.0	59.2
2X27	52.0	61.2
2X28	54.0	63.2
2X29	56.0	65.2
2X30	58.0	67.2
2X31	60.0	69.2
2X32	62.0	71.2
2X33	64.0	73.2
2X34	66.0	75.2

东莞市晟凯达电子科技有限公司
 工程专用章

受控

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X. X ±0.35	DESIGN			UNIT	mm		
					X. XX ±0.25		CHECK	Lisa	2016.06.06	SIZE		A4
AO	2016.06.06	NEW	—	—	X. XXX ±0.15	APPROVE				SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.	⊕	TITLE:	BH2.0 H=5.6 2xXXPin Gold PA6T BK SMT WV Box Header
					DIM	TOL						