
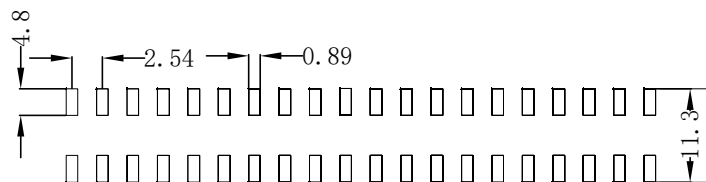

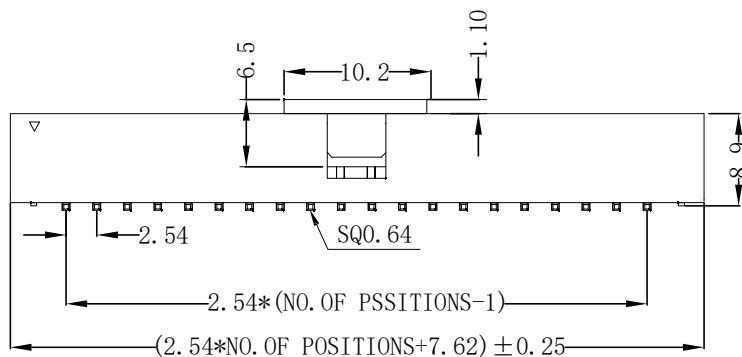


RoHS

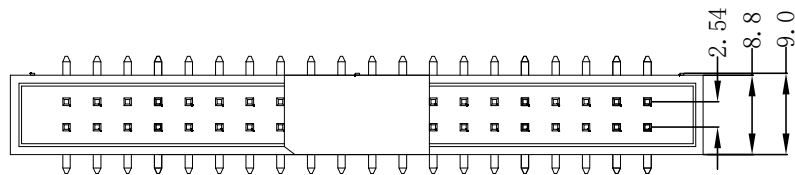



PCB LAYOUT

SPECIFICATIONS

Current Rating: 3AMPS
 Insulator resistance:5000 megohms min
 Dielectric Withstanding:500V AC
 Operating Temperature: -40° C~+105° C
 Insulator Material: PA6T
 Plating: Gold flash
 UMIT: MM
 Unspecified Tolerance:±0.2.

东莞市晟凯达电子科技有限公司
 工程专用章

受控

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2016.06.06	SIZE		A4
AO	2016.06.06	NEW			X.XXX ±0.15	APPROVE			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.		TITLE:	BH2.54 H=8.9 2xXXPin Gold PA6T BK SMT WV Box Header
					DIM TOL							