

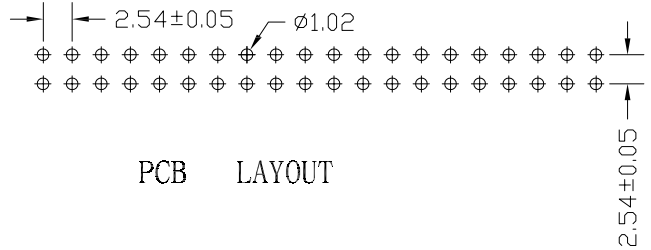
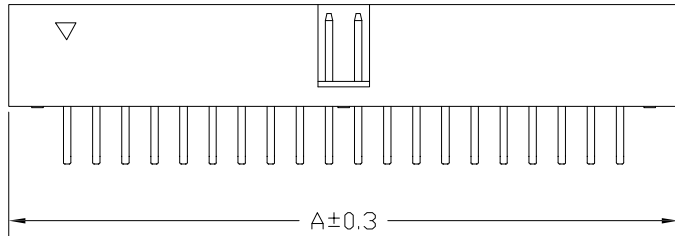


RoHS

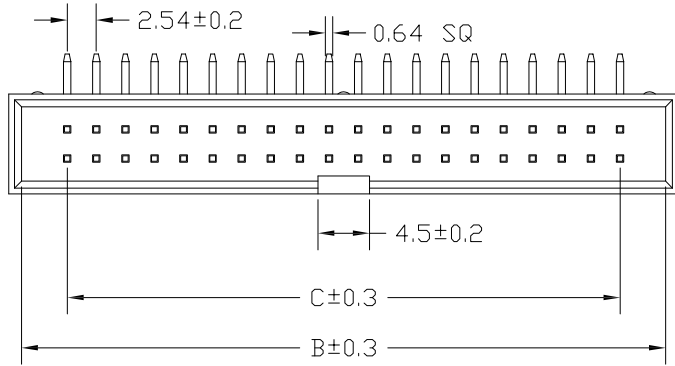

MATERIAL&FINISH
 Insulator: PBT Glass Fiber(UL94V-0)
 Contact : Brass
 Contact : Gold-Plated Over Nickel
 SPECIFICATIONS
 Current Rating :1A AC,DC
 Voltage Rating : 250V AC,DC
 Temperature Range:-40°C To+105°C
 Contact Resistance:20mΩ MAX
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:500V AC/Min

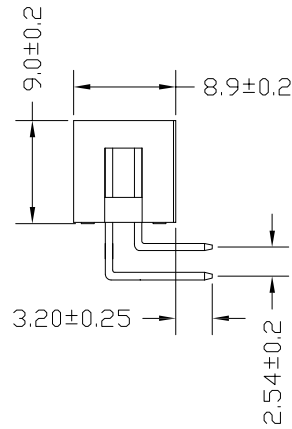

PIN	DIMENSIONS		
	A	A	A
8P	17.78	15.58	7.62
10P	20.32	18.12	10.16
12P	22.86	20.66	12.70
14P	25.40	23.20	15.24
16P	27.94	25.74	17.78
18P	30.48	28.28	20.32
20P	33.02	30.82	22.86
24P	38.10	35.90	27.94
26P	40.64	38.44	30.48
30P	45.72	43.52	35.56
34P	50.80	48.60	40.64
40P	58.42	56.22	48.26
44P	63.50	61.30	53.34
50P	71.12	68.92	60.96
56P	78.74	76.54	68.58
60P	83.82	81.62	73.66
64P	88.90	86.70	78.74

东莞市晟凯达电子科技有限公司
 工程专用章

受控

					OPERATION	DRAW	Yang	2020.03.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35			UNIT	mm			
					X.XX	±0.25			SIZE	A4			
A0	2020.03.03		NEW		X.XXX	±0.15		2020.03.03	SHEET	1/1		PART NO.	BH254H900RT-2xXXGD3503
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'		APPROVE		PROJ.	TITLE:	BH2.54 H=9.0 2xXXPin Gold PBT BK RT Box Header
					DIM	TOL							