

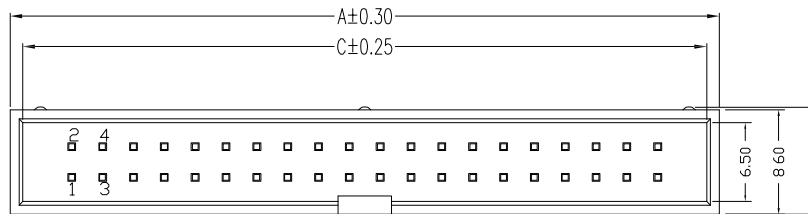


RoHS

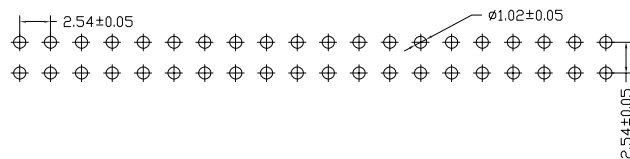

MATERIAL&FINISH
 Insulator: PBT Glass Fiber(UL94V-0)
 Contact : Brass
 Contact : Gold-Plated Over Nicke
 SPECIFICATIONS
 Current Rating :1A AC,DC
 Voltage Rating : 250V AC,DC
 Temperature Range:-40°C To+105°C
 Contact Resistance:20mΩ MAX
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:500V AC/Min

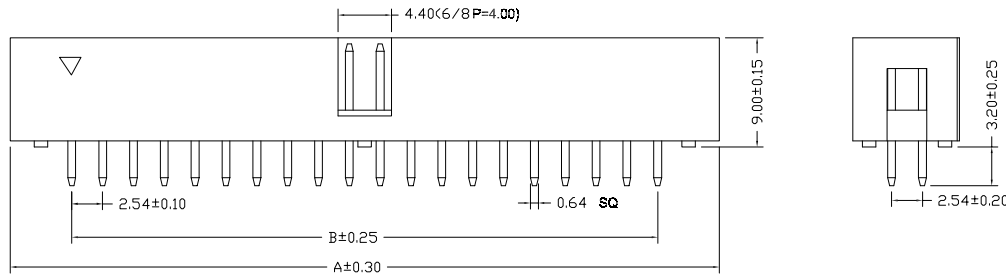

东莞市晟凯达电子科技有限公司
 工程专用章

受控

PART NO	Dim. A	Dim. B	Dim. C
10P	20.32	10.16	17.92
14P	25.40	15.24	23.00
16P	27.94	17.78	25.54
20P	33.02	22.86	30.62
26P	40.64	30.48	38.24
30P	45.72	35.56	43.32
34P	50.80	40.64	48.40
36P	53.34	43.18	50.94
40P	58.42	48.26	56.02
50P	71.12	60.96	68.72
60P	83.82	73.66	81.42
64P	88.90	78.74	86.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SHEET	PART NO.	TITLE:
A0	2020.03.03	NEW			X.X ±0.35	Yang	-	mm	1/1	BH254H900ST-2xXXGD3503	BH254 H=9.0 2x04Pin Gold PBT BK ST Box Header
					X.XX ±0.25			A4			
					X.XXX ±0.15	Lisa					
					Angle ± 3'						
					DIM TOL						

SCONDAR
 SCONDAR ELECTRONIC LIMITED