



RoHS

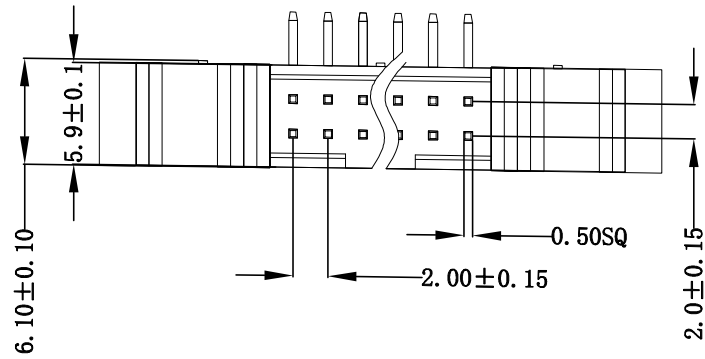

Technical Parameters:
 Rated current: 1A AC/DC
 Withstand voltage: 500V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20MΩ MAX
 Operating temperature: -40° C ~ +105° C
 Insulator Material: PBT UL94V-0
 Contact Plating: Flash Gold
 Contact Material: Brss

$$A = 2.0 * \frac{NP}{2} + 15.92 \pm 0.25$$

$$B = 2.0 * \frac{NP}{2} - 2.0 \pm 0.20$$

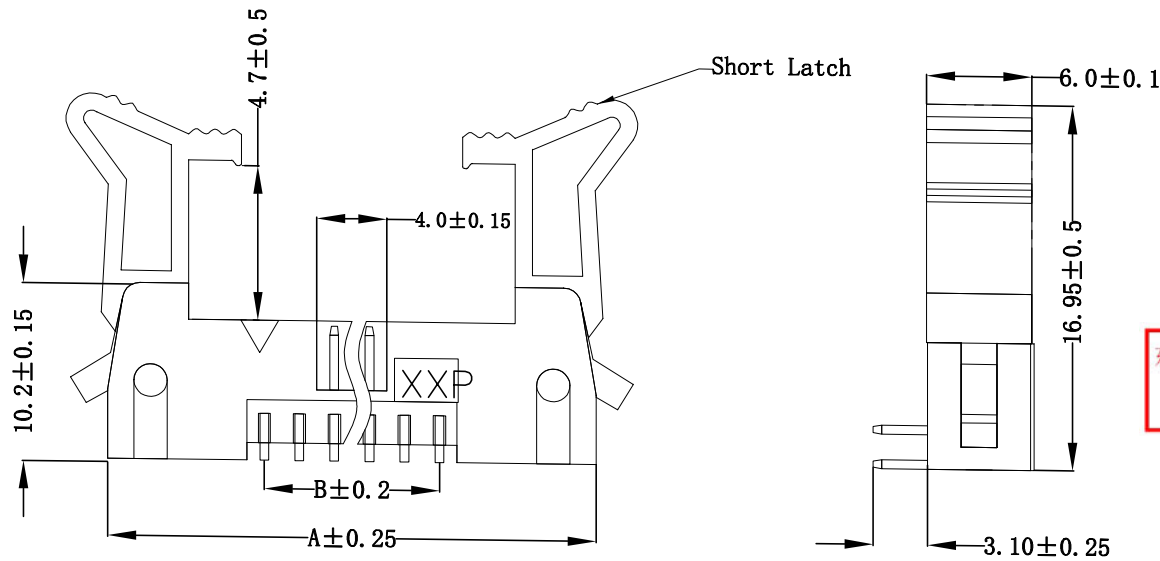

东莞市晟凯达电子科技有限公司
 工程专用章

受控

NUMBER OF POSITION	Dimensions	
	A	B
6P	21.92	4.00
8P	23.92	6.00
10P	25.92	8.00
12P	27.92	10.00
14P	29.92	12.00
16P	31.92	14.00
20P	35.92	18.00
24P	39.92	22.00
26P	41.92	24.00
30P	45.92	28.00
34P	49.92	32.00
40P	55.92	38.00
44P	59.92	42.00
50P	65.92	48.00
60P	75.92	58.00
64P	79.92	62.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION	DRAW	YANG	2016.06.06	SCALE	UNIT	SIZE	SHEET	PROJ.	PART NO.	TITLE:
A0	2016.06.06	NEW			X.X	±0.35	OPERATION	YANG		2016.06.06	—	mm	A4	1/1			
					X.XX	±0.25	DESIGN										
					X.XXX	±0.15	CHECK	Lisa		2016.06.06							
					Angle	±3°	APPROVE										



SCONDAR ELECTRONIC LIMITED

EH200L470RT-2XXGD3503

EH2.00 L=4.7 H=16.95 2xXXPin Gold PBT BK ST Box Header (低耳牛角配两件式IDC)